


Insertor/Extractor Handle Type IET, Grey Lever, Black Button, Bottom, 100 Pieces


KATALOGOVÉ ČÍSLO

20817-661

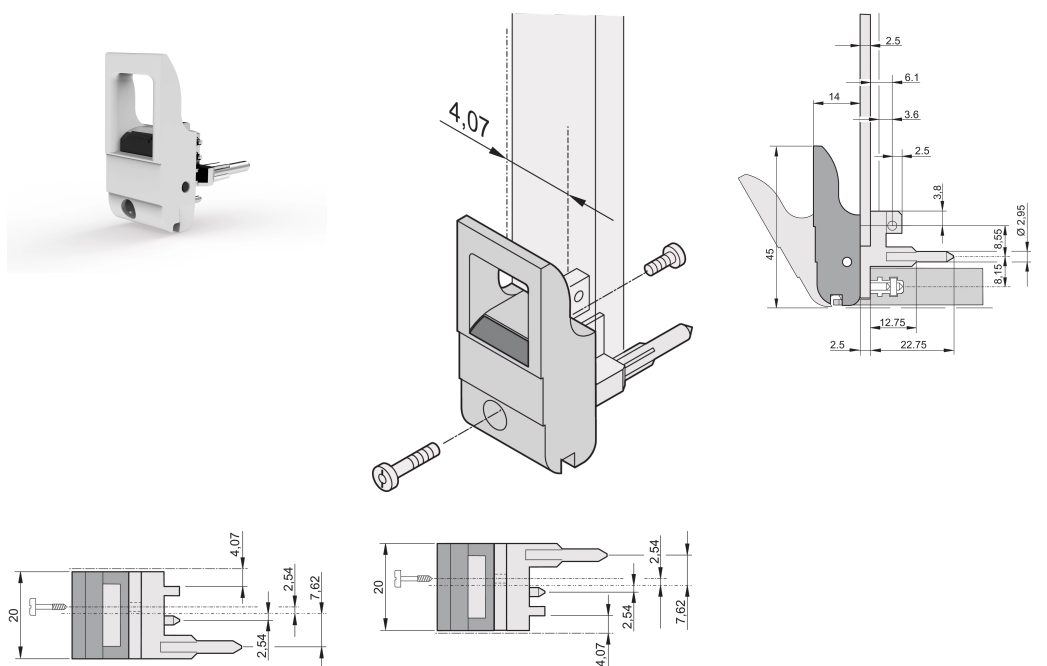

The inserter/extractor handle, type IET in accordance with IEEE 1101.10. Two of these handles can overcome a single lever force of 700 N (per pair).

CERTIFICATIONS



VLASTNOSTI

Suitable for insertion and extraction forces up to 700 N (per pair)

In accordance with IEEE 1101.10 and IEC 60297-3-102

A microswitch can be mounted

With locking

Codeable i.a.w. IEEE 1101.10 and IEC 60297-3-103

Množství v balení: 100

Typ rukojeti: IET; Bottom Front; Top Rear I/O

Flammability Rating: UL® 94V-0

Barva: Grey

Complies With: EN 45545-2

Materiál: Polycarbonate

Product Type: Handle

Typ: Inserter/Extractor, Standard

Works With: Front Panels

Gross Weight: 2.276kg

Please order Coding pegs and Microswitch separately.

Technical drawing of a mechanical part, likely a bracket or connector, showing an exploded view and two orthographic views (top and bottom).

Exploded View: Shows the main part and two screws. A dimension of 4.07 is indicated for the distance between the screw holes.

Top View: Shows the part from above. Dimensions include: 20 (total width), 2.54 (width of the central slot), 7.62 (width of the base), 0.87 (width of the base flange), 2.54 (width of the base flange), and 2.54 (width of the base flange).

Bottom View: Shows the part from below. Dimensions include: 20 (total width), 2.54 (width of the central slot), 7.62 (width of the base), 0.87 (width of the base flange), 2.54 (width of the base flange), 2.54 (width of the base flange), 2.5 (width of the base flange), 6.1 (width of the base flange), 3.8 (width of the base flange), 2.5 (width of the base flange), 3.8 (width of the base flange), 3.8 (width of the base flange), 8.15 (width of the base flange), 8.55 (width of the base flange), 2.95 (width of the base flange), 26 (width of the base flange), 12.75 (width of the base flange), 2.5 (width of the base flange), 22.75 (width of the base flange), 45 (width of the base flange), 14 (width of the base flange), 2.5 (width of the base flange), 3.8 (width of the base flange), 6.1 (width of the base flange), 2.5 (width of the base flange).

Produkty nVent musí být instalovány a používány pouze tak, jak je uvedeno v instrukčních listech a materiálech pro školení nVent. Instrukční listy jsou k dispozici na www.nvent.com a od vašeho zástupce zákaznického servisu nVent. Nesprávná instalace, zneužití, nesprávné použití nebo jiný nedostatek úplného dodržování pokynů a varování nVent může způsobit selhání produktu, poškození majetku, vážné zranění osob a smrt a/nebo zrušit vaši záruku.

North America

All locations
+1.763.422.2661
Chat with us:
nvent.com/schroff

Europe

Straubenhardt, Germany
+49.7082.794.0
Betschdorf, France
+33.3.88.90.64.90
Warsaw, Poland
+48.22.209.98.35
Assago, Italy
+39.02.932.7141
Chat with us:
nvent.com/schroff

Asia

Shanghai, China
+86.21.2412.6943
Qingdao, China
+86.532.8771.6101
Singapore
+65.6768.5800
Shin-Yokohama, Japan
+81.45.476.0271
Chat with us:
nvent.com/schroff

Middle East & India

Dubai, United Arab
Emirates
+971.4.378.1700
Bangalore, India
+91.80.6715.2001
Istanbul, Turkey
+90.216.250.7374
Chat with us:
nvent.com/schroff



Naše portfolio silných značek:

CADDY

ERICO

HOFFMAN

ILSCO

SCHROFF

TRACHTE