


715066

Double Rail Contact Assembly

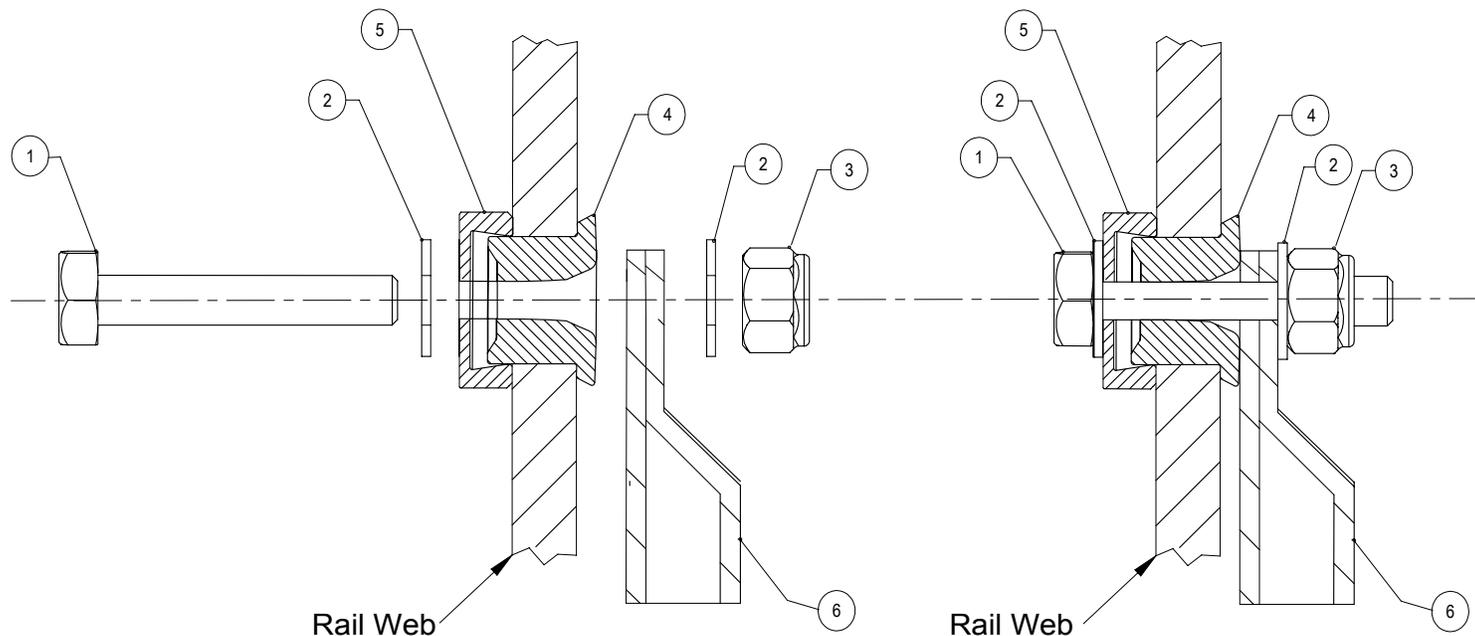

Prior to installation, read and follow the instructions below, and the instructions shown in ERICO® ERICONCONTACT catalog R408C.

1. Drill the rail at the neutral axis, using drill template.
2. Use go no-go gauge to verify hole dimension.
3. Insert bushing into the rail, install cap on bushing. Using insertion mandrel and the insertion tool, install the bushing on the rail.
4. Install hex bolt, flat washers, lug, and self locking nut as depicted above. Recommended torque 88 lbf ft [120Nm]

Item	Part No.	Qty	Description
1	A927F259	1	M14-2 Hex Bolt
2	A929A117	2	9/16" S.S. Flat Washer
3	A928B088	1	Nut, Lock, M14-2, Nylon Insert
4	715176	1	Bushing, 28mm, Cu
5	DSK28CAP	1	Cap, 28mm, Cu
6	716224	1	Lug, Cable, Tubular, Crimp, Cu

WARNING:

1. ERICO products shall be installed and used only as indicated in ERICO product instruction sheets and training materials. Instruction sheets are available at www.erico.com and from your ERICO customer service representative.
2. ERICO products must never be used for a purpose other than the purpose for which they were designed or in a manner that exceeds specified load ratings.
3. All instructions must be completely followed to ensure proper and safe installation and performance.
4. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.

SAFETY INSTRUCTIONS:

All governing codes and regulations and those required by the job site must be observed. Always use appropriate safety equipment such as eye protection, hard hat, and gloves as appropriate to the application.

CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.