


MultipacPRO 19" Chassis Basic Kit, 2 U, Depth 220 mm

CATALOG NUMBER

20860-210

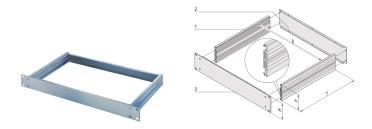

Such a kit enables a customer to configure the 3 different top / bottom covers.

CERTIFICATIONS



FEATURES

For non-standardized assemblies (1 ... 5 U) and standardized assemblies (1, 2 U) conforming to IEC 60297-3-105

Frame consists of two lateral parts and front/rear panel

Material: aluminium

Select further components (Accessories)

PRODUCT ATTRIBUTES

Rack Height: 2U

Depth: 220mm

Usable Width: 403mm

Mounting: Rack

Complies With: IEC 60297-3-100

EMC Shielding: No (Retrofittable)

Material: Aluminum

Product Family: MultipacPRO

Product Type: Subrack/Chassis

Type: Configurable

Net Weight: 1.29kg

ADDITIONAL PRODUCT DETAILS

Please order mounting plate, cover and base plates, handles, telescopic slides separately.

Dimensions h = clear mounting height = H-8.1 mm, b = clear mounting width = 403 mm.

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

All locations +1.763.422.2661 Chat with us: nvent.com/schroff

Europe

Straubenhardt, Germany +49.7082.794.0 Betschdorf, France +33.3.88.90.64.90 Warsaw, Poland +48.22.209.98.35 Assago, Italy +39.02.932.7141 Chat with us: nvent.com/schroff

Asia

Shanghai, China

+86.21.2412.6943
Qingdao, China
+86.532.8771.6101
Singapore
+65.6768.5800
Shin-Yokohama, Japan
+81.45.476.0271
Chat with us:
nvent.com/schroff

Middle East & India

Dubai, United Arab Emirates +971.4.378.1700 Bangalore, India +91.80.6715.2001 Istanbul, Turkey +90.216.250.7374 Chat with us: nvent.com/schroff



Our powerful portfolio of brands:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE