


CABS Busbar Support Kit

Power Utilities



CERTIFICATIONS



FEATURES

For all busbar types

Improve bending resistance by interlocking or stacking two profiles

Quick and easy to install

Halogen free insulators

RoHS compliant

SPECIFICATIONS

Table 1/3

| Catalog Number | Article Number | Typical Application Current Rating | Max Working Voltage, IEC (Ui) | Working Temperature | Busbars per Phase | Busbar Width |
|----------------|----------------|------------------------------------|-------------------------------|---------------------|-------------------|--------------|
| CABS4-5TN-400 | 549310 | 400 – 4,500 A | 1,000 VAC, 1,500 VDC | -40 to 130 °C | 1 – 4 | 30 – 125 mm |


Table 2/3

| Catalog Number | Article Number | Busbar Thickness | Width (W) | A | B | C |
|----------------|----------------|------------------|-----------|--------|-------|--------|
| CABS4-5TN-400 | 549310 | 5 mm | 350 mm | 300 mm | 75 mm | 325 mm |

Table 3/3

| Catalog Number | Article Number | Unit Weight |
|----------------|----------------|-------------|
| CABS4-5TN-400 | 549310 | 0.800 kg |

DIAGRAMS

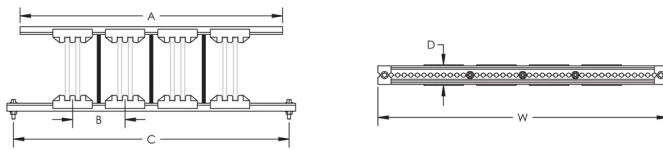

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.



Our powerful portfolio of brands:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE