


BCSP Series Box Conduit Support Platform Flat

Part Number	Box Size	Threaded Rod
BCSP612F	4"-12"	3/8-16

Mounting Configurations

Position Box / Boxes onto BCSP612F. Fasten Box / Boxes Using Drill & Tap Screws (Box and Hardware Not Included)

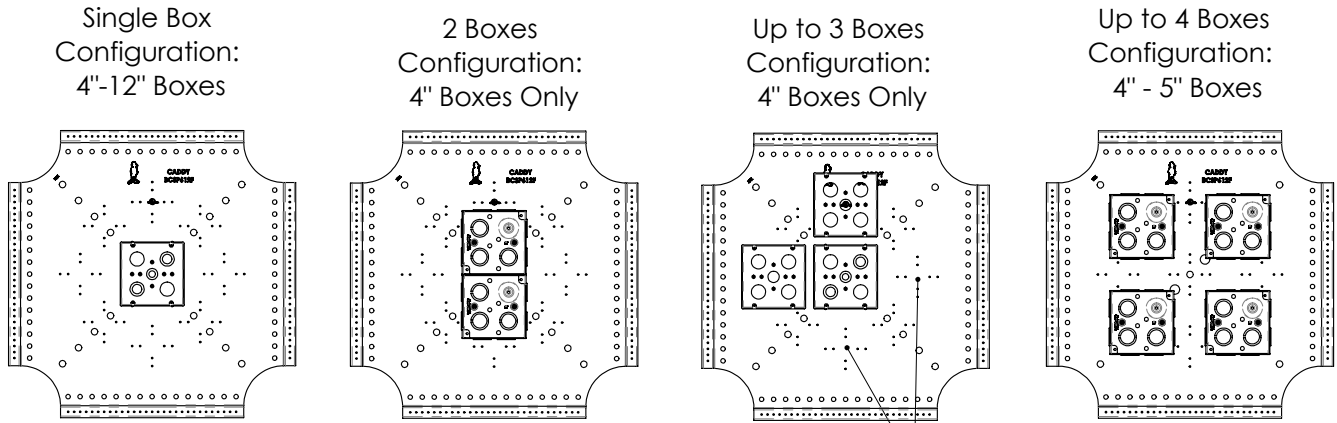

2 Drill & Tap Screws Per Box


Alternate Locations for Mounting Boxes

Horizontal Support:

Suitable for use as a fixture and luminaire support of 110 lbs or less when a single box is mounted in the center of the bracket.

Listed for a box support when up to 4 boxes are mounted onto the bracket.

In Canada, some provinces and territories may require additional threaded rods to support the suspended enclosure. Maximum Rated Load of 50 lbs in Canada.

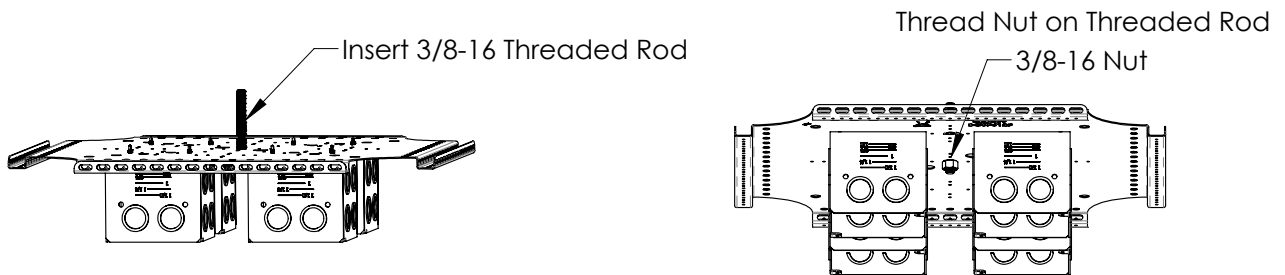

WARNING:

- nVent products shall be installed and used only as indicated in nVent product instruction sheets and training materials. Instruction sheets are available at www.nVent.com and from your nVent customer service representative.
- nVent products must never be used for a purpose other than the purpose for which they were designed or in a manner that exceeds specified load ratings.
- All instructions must be completely followed to ensure proper and safe installation and performance.
- Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and/or death, and void your warranty.
- Products that are manufactured using spring steel components shall be used only in a non-corrosive indoor environment.
- All pipe supports, hangers, intermediate components and structural attachments must ONLY be used as described herein and are NEVER to be used for any other purpose.

NOTE: All load ratings are for static conditions and do not account for dynamic loading such as wind, water or seismic loads, unless otherwise noted.

The customer is responsible for:

- Conformance to all governing codes.
- The integrity of structures to which the products are attached, including their capability of safely accepting the loads imposed, as evaluated by a qualified engineer.
- Using appropriate industry standard hardware as noted above.

SAFETY INSTRUCTIONS:

All governing codes and regulations and those required by the job site must be observed. Always use appropriate safety equipment such as eye protection, hard hat, and gloves as appropriate to the application.

nVent, nVent CADDY, nVent ERICO Cadweld, nVent ERICO Critec, nVent ERICO, nVent ERIFLEX, and nVent LENTON are owned by nVent or its global affiliates. All other trademarks are the property of their respective owners. nVent reserves the right to change specifications without prior notice.

TECHNICAL SUPPORT:
www.nVent.com

89234243_B

1 OF 2

© 2023 nVent All Rights Reserved



Vertical Support:

Suitable for use as a fixture and luminaire support of 7 lbs in the wall when up to 4 boxes are mounted to the bracket.

Can also be used as a box support in the U.S. when up to 4 boxes are mounted to the bracket and the bracket is secured to a 16" stud spacing or on a post / wall structure.

Post or Wall Mount:

Place on Post or Wall and Attach with 2 Drill & Tap Screws.

When mounting on a 16" stud spacing, fasten with 4 Drill & Tap Screws with 1 at each corner.

