


Front Panel EMC Textile Shielding Kit, -40 up to +70°C



The textile EMC gaskets are inserted into a slot on the right hand side of the U-shaped front panels. The gaskets are glued to the front panel.

CERTIFICATIONS



FEATURES

Textile EMC gasket is affixed laterally on the front panel or in the groove of the right-hand profile as appropriate.

Profile seal is bonded onto the contact surface of the 19" bracket or of the rear angle and sets up the conductive connection to the U-shaped front panels

Temperature range -40 °C ... +70 °C

SPECIFICATIONS

Works With: Subracks; Cases; Front Panels

Product Family: EuropacPRO; RatiopacPRO; RatiopacPRO AIR; PropacPRO; Frame Type Plug-In Unit

Product Type: Shielding Kit

Material: Thermoplastic Elastomer


| Table 1/2 | | | | | | |
|-------------------|-------------|---------------------|-----------|------------|-----------|------------------------|
| Catalog Number | Rack Height | Package Quantity | Depth (D) | Height (H) | Width (W) | Flammability Rating |

| 21101-978 | 5U | 10 | | | | |
|-----------|----|-----|--------|---------|-------|-----------|
| 21101-857 | 2U | 10 | 1.62mm | 52mm | 3.8mm | UL® 94V-0 |
| 21101-853 | 3U | 10 | 1.62mm | 97mm | 3.8mm | UL® 94V-0 |
| 21101-858 | 4U | 10 | | | | |
| 21101-854 | 3U | 100 | 1.62mm | 97mm | 3.8mm | UL® 94V-0 |
| 21101-855 | 6U | 10 | 1.62mm | 232mm | 3.8mm | UL® 94V-0 |
| 21101-856 | 6U | 100 | 1.62mm | 232mm | 3.8mm | UL® 94V-0 |
| 21101-904 | 9U | 100 | | | | |
| 21101-859 | 9U | 10 | 1.62mm | 365.5mm | 3.8mm | UL® 94V-0 |

| Table 2/2 | | | | |
|----------------|------------|--|--|--|
| Catalog Number | Quick Ship | | | |
| 21101-978 | No | | | |
| 21101-857 | No | | | |
| 21101-853 | No | | | |
| 21101-858 | No | | | |
| 21101-854 | No | | | |
| 21101-855 | No | | | |
| 21101-856 | No | | | |
| 21101-904 | No | | | |
| 21101-859 | No | | | |

EMC gaskets (textile) are required for shielding the front panels.

DIAGRAMS

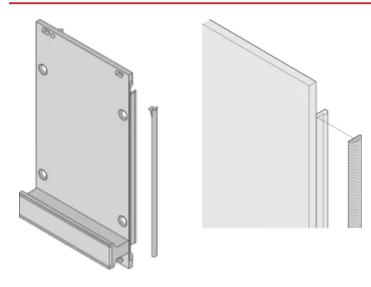

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

All locations +1.763.422.2661 Chat with us: nvent.com/schroff

Europe

Straubenhardt, Germany +49.7082.794.0 Betschdorf, France +33.3.88.90.64.90 Warsaw, Poland +48.22.209.98.35 Assago, Italy +39.02.932.7141 Chat with us: nvent.com/schroff

Asia

Shanghai, China

+86.21.2412.6943 Qingdao, China +86.532.8771.6101 Singapore +65.6768.5800 Shin-Yokohama, Japan +81.45.476.0271 Chat with us: nvent.com/schroff

Middle East & India

Dubai, United Arab **Emirates** +971.4.378.1700 Bangalore, India +91.80.6715.2001 Istanbul, Turkey +90.216.250.7374 Chat with us: nvent.com/schroff



Our powerful portfolio of brands:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE