


Front Panel, Shielded, Side Hinged, 3 U, 84 HP, 2.5 mm, Al, Front Anodized, Rear Conductive

CATALOG NUMBER

20848-611

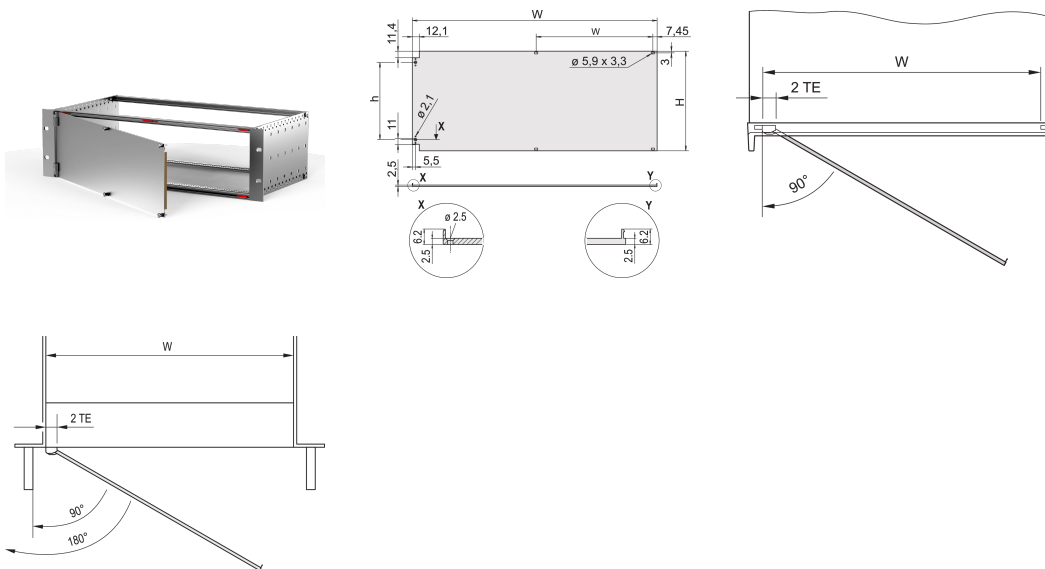

Front panel with textile EMC gasket, side hinged assembly.

CERTIFICATIONS



FEATURES

Front panel with textile EMC gasket

Enables mounting onto the horizontal rails

Suitable for subracks and cases

Hinges can be fitted on left or right

Rack Height: 3U
Package Quantity: 1
Accessory Type: Front panel
Mounting: Hinged, Side
EMC Gasket Type: Textile
Front Finish: Anodized
Rear Finish: Conductive
Treated Edges: No
Depth (D): 2.5mm
EMC Shielding: No (Retrofittable)
Finish: Anodized; Passivated
Height (H): 128.4mm
Material: Aluminum
Product Type: Front Panel
Rack Width: 84HP
Type: Front Panel without Handle
Width (W): 426.4mm

The technical drawing illustrates the 2TE system. The left part is a perspective view showing a horizontal bar of width W with a vertical support on the left. A rod is attached to the bar, pivoted at a point labeled $2TE$. The rod can rotate, with angles of 90° and 180° indicated. The right part is a detailed front view of the assembly. It shows a rectangular plate of width W and height H . The plate has a top edge with a thickness of 11.4 and a bottom edge with a thickness of 11 . The left edge has a thickness of 2.5 . A rod of diameter $\phi 5.9 \times 3.3$ is attached to the plate. The rod has a length of 12.1 and a thickness of 7.45 . The rod is pivoted to the plate at a point labeled X . The plate has a hole of diameter $\phi 2.7$ at the pivot point. The plate is supported by a base of width Y . The base has a thickness of 2.5 and a hole of diameter $\phi 2.5$ at the pivot point. The base is labeled Y at the right end.

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America

All locations
+1.763.422.2661
Chat with us:
nvent.com/schroff

Europe

Straubenhardt, Germany
+49.7082.794.0
Betschdorf, France
+33.3.88.90.64.90
Warsaw, Poland
+48.22.209.98.35
Assago, Italy
+39.02.932.7141
Chat with us:
nvent.com/schroff

Asia

Shanghai, China
+86.21.2412.6943
Qingdao, China
+86.532.8771.6101
Singapore
+65.6768.5800
Shin-Yokohama, Japan
+81.45.476.0271
Chat with us:
nvent.com/schroff

Middle East & India

Dubai, United Arab Emirates
+971.4.378.1700
Bangalore, India
+91.80.6715.2001
Istanbul, Turkey
+90.216.250.7374
Chat with us:
nvent.com/schroff



Our powerful portfolio of brands:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE