

# Strike Pad, Metric Thread



## FEATURES

316L Stainless Steel used in areas where a better aesthetic finish is preferred

Ideal for environments that are conducive to corrosive effects, such as coastal/high salinity


Provides an exposed attractive point on conductor systems hidden in the building's fabric, e.g. below the tiles of a pitched roof

## SPECIFICATIONS

Table 1/1

Catalog Number	Material	Diameter (Ø)	Thread Length (TL)	Height (H)	Thread Size (TS)	Unit Weight
SSP100	Stainless Steel 316L (EN 1.4404)	100 mm	10mm	25.5 mm	M6	0.36 kg

## DIAGRAMS

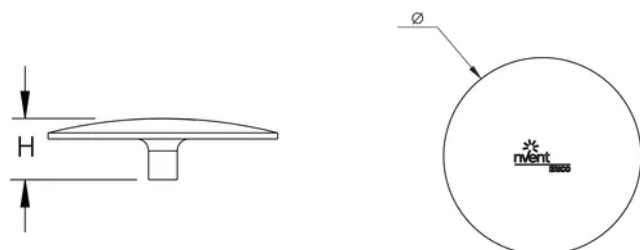

**WARNING**

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at [www.nvent.com](http://www.nvent.com) and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

**North America**

+1.800.753.9221  
Option 1 – Customer Care  
Option 2 – Technical  
Support

**Europe**

Netherlands:  
+31 800-0200135  
France:  
+33 800 901 793

**Europe**

Germany:  
800 1890272  
Other Countries:  
+31 13 5835404

**APAC**

Shanghai:  
+ 86 21 2412 1618/19  
Sydney:  
+61 2 9751 8500



Our powerful portfolio of brands:

**CADDY   ERICO   HOFFMAN   ILSCO   SCHROFF   TRACHTE**