2 Hole Lug

FEATURES

Provides an efficient bolting surface for grounding and power applications

Electrolytic grade copper

For use with nVent ERICO Cadweld type LA connections only

SPECIFICATIONS

Material: Copper

Type: NEMA®

Finish: Tinned

Table 1/2						
Catalog Number	Length (L)	Width (W)	Thickness (T)	A	B	Hole Size (HS)
B102CE	4"	1"	0.12"	0.62"	1 3/4"	0.56"
B103CE002	3 1/2"	1"	0.12"	0.62"	1 3/4"	0.44"
B102DE	4"	1"	0.19"	0.62"	1 3/4"	0.56"
B102EE	4.12"	1"	1/4"	0.62"	1 3/4"	0.56"
B102EG	4.12"	1 1/2"	1/4"	0.62"	1 3/4"	0.56"

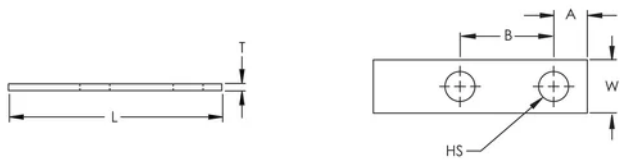| CatalogNumber	Length (L)	Width (W)	Thickness (T)	A	B	Hole Size (HS)
B102EH	4.12"	2"	1/4"	0.62"	1 3/4"	0.56"
B102EH001	6"	2"	1/4"	0.62"	1 3/4"	0.56"
B103EK004	3"	3"	1/4"	1"	1 3/4"	0.56"
B102GG	4 3/4"	1 1/2"	0.38"	0.62"	1 3/4"	0.56"
B102GH	4 3/4"	2"	0.38"	0.62"	1 3/4"	0.56"
B102JH	5 1/4"	2"	1/2"	0.62"	1 3/4"	0.56"

Table 2/2	
Catalog Number	**Equivalent Conductor Size**
B102CE	159.12kcmil
B103CE002	159.12kcmil
B102DE	238.69kcmil
B102EE	318.25kcmil
B102EG	477kcmil
B102EH	636.5kcmil
B102EH001	636.5kcmil
B103EK004	954.75kcmil
B102GG	716.06kcmil
B102GH	954.75kcmil
B102JH	1273kcmil

ADDITIONAL PRODUCT DETAILS

For sizes not listed, contact us.

DIAGRAMS

WARNING

nVent products shall be installed and used only as indicated in nVent's product instruction sheets and training materials. Instruction sheets are available at www.nvent.com and from your nVent customer service representative. Improper installation, misuse, misapplication or other failure to completely follow nVent's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death and/or void your warranty.

North America
+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical
Support

Europe
Netherlands:
+31 800-0200135
France:
+33 800 901 793

Europe
Germany:
800 1890272
Other Countries:
+31 13 5835404

APAC
Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500

Our powerful portfolio of brands:

CADDY   ERICO   HOFFMAN   ILSCO   SCHROFF   TRACHTE

This document is system-generated.