


Insertor/Extractor Handle Type IET, Grey Lever, Black Button, Bottom, 10 Pieces


CODICE A CATALOGO

20817-660

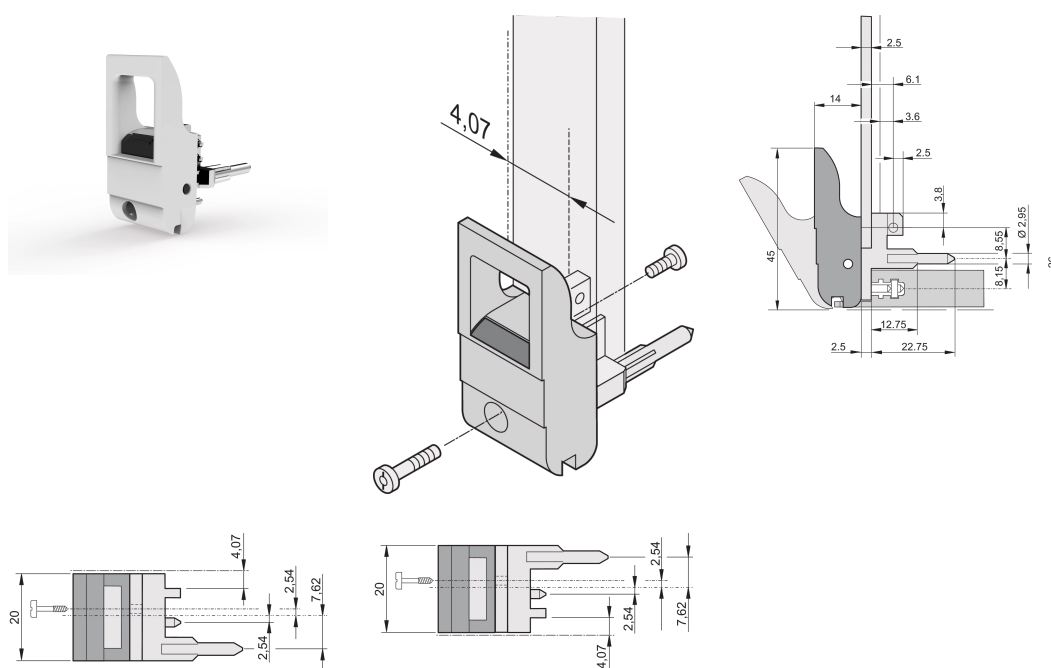

The inserter/extractor handle, type IET in accordance with IEEE 1101.10. Two of these handles can overcome a single lever force of 700 N (per pair).

CERTIFICAZIONI



CARATTERISTICHE

Suitable for insertion and extraction forces up to 700 N (per pair)

In accordance with IEEE 1101.10 and IEC 60297-3-102

A microswitch can be mounted

With locking

Codeable i.a.w. IEEE 1101.10 and IEC 60297-3-103

Quantità nella confezione: 10

Classificazione dell'inflammabilità: UL® 94V-0

Colore: Grigio

È conforme a: EN 45545-2

Materiale: Policarbonato

Tipo di prodotto: Manopola

Tipo: Inseritore/Estrattore, standard

Funziona con: Pannelli frontali

Please order Coding pegs and Microswitch separately.

Technical drawing of a door handle assembly. The drawing includes an exploded view of the handle and a detailed view of the handle body with dimensions. The exploded view shows the handle being attached to a door plate. The detailed view of the handle body includes the following dimensions:

- Overall width: 26
- Overall height: 45
- Mounting hole diameter: $\varnothing 2.95$
- Mounting hole offset from bottom: 12.75
- Mounting hole offset from side: 2.5
- Handle body width: 22.75
- Handle body height: 14
- Handle body offset from side: 6.1
- Handle body offset from bottom: 3.6
- Handle body offset from side (inner): 2.5
- Handle body offset from bottom (inner): 3.8
- Handle body offset from side (inner): 6.15
- Handle body offset from bottom (inner): 6.95
- Handle body offset from side (inner): 2.54
- Handle body offset from bottom (inner): 2.54
- Handle body offset from side (inner): 1.07
- Handle body offset from bottom (inner): 7.62

The exploded view shows the handle being attached to a door plate. The handle is shown in two positions: one where it is being inserted into the door plate and another where it is fully inserted. The door plate has a mounting hole with a diameter of $\varnothing 4.07$.

I prodotti nVent devono essere installati e utilizzati solo come indicato nelle schede istruzioni e nei materiali di formazione di nVent. Le schede istruzioni sono disponibili su www.nvent.com e presso il vostro rappresentante del servizio clienti nVent. Un'installazione scorretta, un uso improprio, un'applicazione errata o qualsiasi altro mancato rispetto completo delle istruzioni e degli avvertimenti di nVent può causare malfunzionamenti del prodotto, danni alla proprietà, gravi lesioni personali e morte e/o annullare la vostra garanzia.

North America

All locations
+1.763.422.2661
Chat with us:
nvent.com/schroff

Europe

Straubenhardt, Germany
+49.7082.794.0
Betschdorf, France
+33.3.88.90.64.90
Warsaw, Poland
+48.22.209.98.35
Assago, Italy
+39.02.932.7141
Chat with us:
nvent.com/schroff

Asia

Shanghai, China
+86.21.2412.6943
Qingdao, China
+86.532.8771.6101
Singapore
+65.6768.5800
Shin-Yokohama, Japan
+81.45.476.0271
Chat with us:
nvent.com/schroff

Middle East & India

Dubai, United Arab Emirates
+971.4.378.1700
Bangalore, India
+91.80.6715.2001
Istanbul, Turkey
+90.216.250.7374
Chat with us:
nvent.com/schroff



Il nostro straordinario portafoglio di marchi:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE