


# nVent ERIFLEX Flexibar Advanced, Tinned Copper

# **Power Utilities**

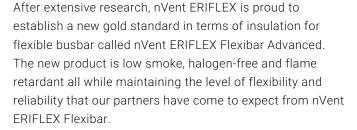

Compared to standard PVC insulation, nVent ERIFLEX Flexibar Advanced does not generate corrosive gases and produces a relatively low smoke opacity in accordance with ISO 5659-2. The low smoke characteristic improves the visibility conditions for people to be able to easily locate the emergency exit and also allows rescue workers to assess an emergency situation more clearly. nVent ERIFLEX Flexibar Advanced means greater safety for individuals, less damage for your electrical equipment and less environmental impact.

The halogen–free feature enables a reduction in the quantity of toxic smoke. nVent ERIFLEX Flexibar Advanced does not contain any halogens, according to IEC 60754-1, minimizing toxicity and making it the ideal product for use in enclosed spaces such as data centers, rail and other spaces where people are welcome such as hospitals and schools. This also facilitates the use of nVent ERIFLEX Flexibar Advanced in specific applications such as submarines, switchboards and other enclosed environments that require a low emissions solution.

In addition to being halogen-free, nVent ERIFLEX Flexibar Advanced is also compliant with the UL 94-V0 testing standard. The flame retardant portion of the test illustrates the self-extinguish feature. This superior feature of nVent ERIFLEX Flexibar Advanced is also shown by the Limiting Oxygen Index (LOI) at 30%. In case of fire, ERIFLEX Flexibar Advanced generates a limited quantity of smoke that is less damaging to your electrical equipment.















# **FUNKSJONER**

Thin layers of tinned electrolytic copper formed into a stack

Full range from 19.5 mm<sup>2</sup> up to 1200 mm<sup>2</sup> and 125 A to 2800 A

Insulated by high-resistance, halogen free, flame retardant and low smoke material with less than 20% contact with conductor for high flexibility

Easily bent, folded, and twisted, improving assembly flexibility, shortening connections, and decreasing footprint

Dramatically smaller and more flexible than comparable cable based on ampacity

Better power density than cable with lower skin effect ratio

Connections made by punching and bolting directly through the copper laminates or clamping onto the end of the nVent **ERIFLEX Flexibar** 

No lugs needed, reducing installation time and improving resistance to vibration

Weight savings and material savings compared to wire alternatives

Reduces total installation cost

Traceability codes and designation part numbers printed on insulation

Conforms to NF EN 45545 obtaining an HL3 classification for chapters R22 and R23

100% production dielectric tested

RoHS compliant

Tinned copper allows for copper or aluminum conductor connections

On request, can be manufactured with other colors (typically with Orange sleeve for battery connection)

Compliant to ISO 6469-1 (Electrically propelled road vehicles - Part 1: Rechargeable energy storage system) - Section 6.2.2 Vibrations

#### **SPESIFIKASJONER**

Table 1/4						
Katalognumme r	Artikkelnumme r	Dielektrisk styrke	Halogenfri klassifisering	Lav røykklassifiseri ng	Røyking, toksisitet og surhetsgrad	UV- resistensvurder ing
FADV2MTC3X9	534001	20	UL® 2885, IEC® 60754-1, IEC® 62821-1	IEC® 61034-2, ISO 5659-2, UL® 2885	IEC® 60754-2	UL® 854, UL® 2556

Table 2/4							
Katalognumme r	Artikkelnumme r	Isolasjon forlengelse		Maks arbeidsspennin g, en 50264-3- 1	Maks arbeidsspennin g, UL/CSA/IEC	Arbeidstemper atur	
FADV2MTC3X9	534001	500	1.8	6000	1000, 1500	-50 to 115	

Table 3/4							
Katalognumme r	Artikkelnumme r	Sertifiseringsd etaljer	ΔТ 40 К.	ΔТ 50 К.	ΔТ 60 К.	Gjennomføring av lag (N)	
FADV2MTC3X9	534001	UL® 67, UL® 758	120	134	147	3	

Table 4/4						
Katalognummer	Artikkelnummer	A	В.	2 bar strømkoeffisient	3 bar strømkoeffisient	
FADV2MTC3X9	534001	9	0.8	1.72	2.25	


### YTTERLIGERE PRODUKTDETALJER

ADMISSIBLE CURRENTS: This table indicates the temperature rise produced by chosen current in the given section. This calculation does not take into account the heat dissipation from the switch gear.

 $\Delta T$  = Temperature of conductors – Internal temperature of panel.

Refer to technical documentation for additional ampacity ratings.

# **DIAGRAMMER**



#### **ADVARSEL**

nVent-produkter må installeres og brukes bare som beskrevet i nVent sine instruksjonsark og opplæringsmateriell. Instruksjonsark er tilgjengelig på www.nvent.com og fra din nVent kundeservice-representant. Ukorrekt installasjon, misbruk, feilaktig anvendelse eller annen manglende etterlevelse av nVent sine instruksjoner og advarsler kan føre til produktfeil, skade på eiendom, alvorlige personskader og død og/eller gjøre garantien ugyldig.



Vår solide portefølje av merkevarer:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE