

# CADDY® PYRAMID Support System


## Single Post Support

GLOBAL PART NUMBER	DESCRIPTION	MAX STATIC LOAD*	
		LBS	N
PHB	RPS FRB 12X12IN, FM	750	3335
PHBR	RPS FRB 12X12IN, RBR	750	3335
360422	RPS FRB 314X314MM, FM	750	3335
360423	RPS FRB 314X314MM, RBR	750	3335


\*Strut framing must be provided and evaluated by end user to ensure it can support applied loads.

\*Maximum recommended load at 5.22psi (36KPa) roof loading. Contact project or roofing engineer for maximum allowable load on individual project roofing system.

ERICO does not recommend the use of CADDY® PYRAMID Supports on sloped rooftops with more than 1/12 pitch unless there is a structural attachment of the supports to the roof structure.

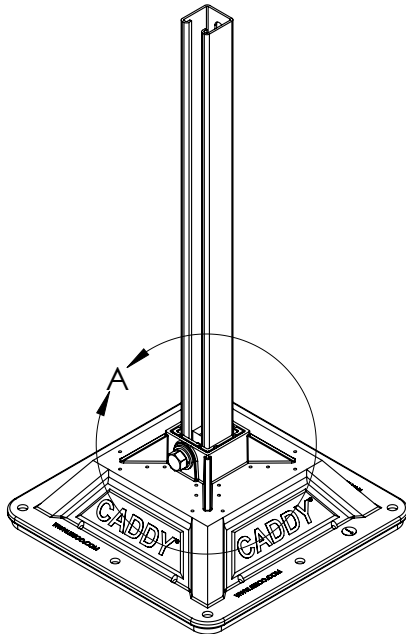

Torque to 125 in-lbs  
do not over tighten

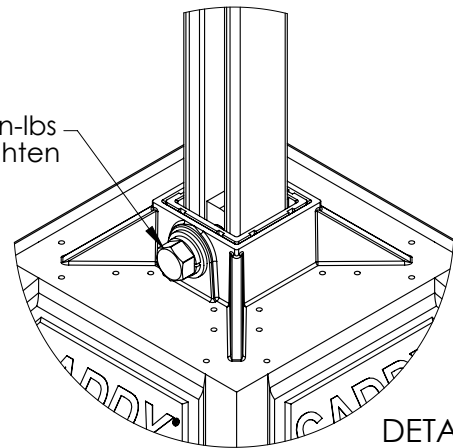

DETAIL A  
SCALE 1 : 4

### Installation steps:

1. Sweep off loose gravel, if gravel exists.
2. Attach vertical strut members as shown.
3. Strut must be installed all the way down.
4. Level system as needed.

### WARNING:

1. ERICO products shall be installed and used only as indicated in ERICO product instruction sheets and training materials. Instruction sheets are available at [www.erico.com](http://www.erico.com) and from your ERICO customer service representative.
2. ERICO products must never be used for a purpose other than the purpose for which they were designed or in a manner that exceeds specified load ratings.
3. All instructions must be completely followed to ensure proper and safe installation and performance.
4. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.
5. Products that are manufactured using spring steel components shall be used only in a non-corrosive indoor environment.
6. All pipe supports, hangers, intermediate components and structural attachments must ONLY be used as described herein and are NEVER to be used for any other purpose.

NOTE: All load ratings are for static conditions and do not account for dynamic loading such as wind, water or seismic loads, unless otherwise noted.

The customer is responsible for:

- a. Conformance to all governing codes.
- b. The integrity of structures to which the products are attached, including their capability of safely accepting the loads imposed, as evaluated by a qualified engineer.
- c. Using appropriate industry standard hardware as noted above.

### SAFETY INSTRUCTIONS:

All governing codes and regulations and those required by the job site must be observed.  
Always use appropriate safety equipment such as eye protection, hard hat, and gloves as appropriate to the application.



CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.

TECHNICAL SUPPORT:  
[www.erico.com](http://www.erico.com)

CFS444\_B

1 OF 1

© 2011, 2013 ERICO International Corporation.

**ERICO®**