

nVent ERIFLEX Flexbus IP55 Ledaringång

Data Solutions



nVent ERIFLEX Flexbus IP55 Conductor Entries can be used for switchboard and/or power supply cover to upgrade an installation to IP55 level. Protect the nVent ERIFLEX Flexbus Conductor insulation against sharp edges from power supply or switchboard top cover.

CERTIFIERINGAR



DESIGN

Uppfyller RoHS

Made with soft PVC to follow any potential conductor bending radius

Sealing around the conductor is made by a self-fusing tape with a strong adhesive

Good resistance to solvent and hydrocarbon splashes

Adaptable to any nVent ERIFLEX Flexbus conductor cross section by cutting the top material with traditional cutter

High acid resistance

UV resistance

Flame retardant

SPECIFIKATIONER

Kapslingens klassning: IP 55

Material: Polyvinylklorid

Arbetsstemperatur: -40 to 140°C


Table 1/2

Katalognummer	Artikelnummer	Typ	A.	B.	C.	Ledarstorlek
FLEXCEIP55C501	508140	Enkel ingång	126mm	102mm	175mm	220 mm ² , 360 mm ² , 545 mm ² , 640 mm ²
FLEXCEIP55C1001	508141	Enkel ingång	176mm	102mm	152mm	960 mm ² , 1280 mm ² , 1810 mm ²
FLEXCEIP55C502	508142	Dubbel ingång	126mm	157mm	175mm	220 mm ² , 360 mm ² , 545 mm ² , 640 mm ²
FLEXCEIP55C1002	508143	Dubbel ingång	176mm	157mm	152mm	960 mm ² , 1280 mm ² , 1810 mm ²

Table 2/2

Katalognummer	Artikelnummer	Vridmoment (TQ)	Enhetens vikt
FLEXCEIP55C501	508140	2.5N·m	0.6kg
FLEXCEIP55C1001	508141	2.5N·m	0.7kg
FLEXCEIP55C502	508142	2.5N·m	0.8kg
FLEXCEIP55C1002	508143	2.5N·m	1kg

DIAGRAMS

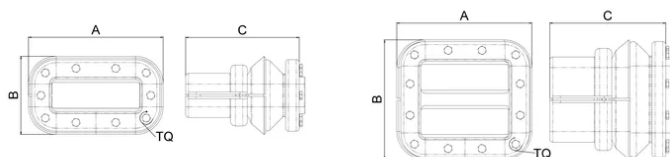

VARNING

nVent produkter ska installeras och användas endast så som anges i nVents bruksanvisning och utbildningsmaterial. Bruksanvisningar är tillgängliga på www.nvent.com och från din nVent kundtjänstrepresentant. Felaktig installation, missbruk, felapplicering eller annan brist i att helt följa nVents instruktioner och varningar kan orsaka att produkten brister, egendomsskador, allvarliga kroppsskador och dödsfall och/eller ogiltigförklara din garanti.



Vårt starka utbud av varumärken:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE