

Adjustable I-Beam Attachment



认证



功能

No loose parts

No assembly required

Snap-off bolt head helps enable easy installation and inspection of seismic sway braces

Meets NFPA®-13 requirements for seismic sway bracing

Meets CEN/TS 17551:2021 requirements for Seismic Sway Bracing

技术参数

Table 1/2

物料号	订货号	材料	完成	法兰厚度 (FT)	A	高度 (H)
CSBIB125180E G	404367	铸铁	电镀锌	19.1 - 31.8 mm	100 - 457 mm	88.9 mm

Table 2/2

物料号	订货号	长度 (L)	宽度 (W)
CSBIB125180EG	404367	546.1mm	79.4 mm


其他产品详情

Structure Attachment and Brace Member are not included.

UL Loads					
Part Number	Structure Attachment Fitting	Flange Thickness	Brace Member	Load Rating	
CSBIB075085	CSBUNIV050	6 - 19 mm	DN25 - DN50 Sch. 40 NPS	4849 N	
	CSBURC12	6 - 19 mm	CSB12CBL	1859 N	
			CSB18CBL	3434 N	
			CSB36CBL	4893 N	
	CSBNPC12	6 - 19 mm	CSB12CBL	1859 N	
			CSB18CBL	3434 N	
			CSB36CBL	6228 N	
	CSBIB075145	CSBUNIV050	6 - 19 mm	DN25 - DN50 Sch. 40 NPS	4849 N
		CSBURC12	6 - 19 mm	CSB12CBL	1859 N
CSB18CBL				3434 N	
CSB36CBL				4893 N	
CSBNPC12		6 - 19 mm	CSB12CBL	1859 N	
			CSB18CBL	3434 N	
			CSB36CBL	6228 N	
CSBIB125180		CSBUNIV050	19 - 31 mm	DN25 - DN50 Sch. 40 NPS	4849 N
		CSBURC12	19 - 31 mm	CSB12CBL	1859 N
	CSB18CBL			3434 N	
	CSB36CBL			4893 N	
	CSBNPC12	19 - 31 mm	CSB12CBL	1859 N	
			CSB18CBL	3434 N	
			CSB36CBL	6228 N	

FM Loads					
Brace Direction	Service Pipe Size	Horizontal Capacity per Installation Angle from Vertical			
		30° - 44°	45° - 59°	60° - 74°	75° - 90°
Parallel	N/A	7205 N	7605 N	4495 N	4940 N
Perpendicular	N/A	7205 N	10230 N	12545 N	13965 N

图

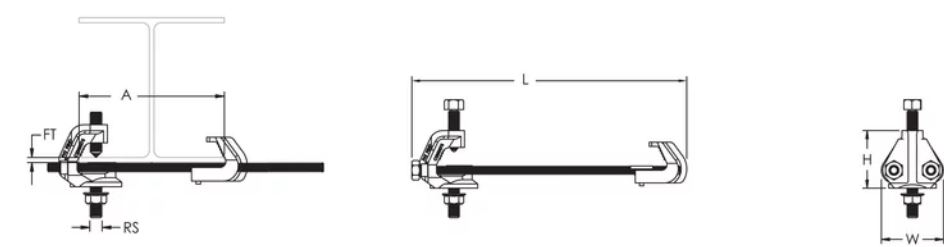

警告

应仅根据 nVent 的产品说明书与培训材料安装并使用 nVent 的产品。可访问 www.nvent.com 获取说明书，或者向您的 nVent 客服代表索取。错误安装、使用不当、滥用或未能完全遵守 nVent 的说明与警告，可能会造成产品故障、财产损失、严重的人身伤害及死亡和/或使得保修服务无效。

北美	欧洲	欧洲	亚太地区
+1.800.753.9221	荷兰：	德国：	上海：
，按 1 转客户服务	+31 800-0200135	800 1890272	+ 86 21 2412 1618/19
，按 2 转技术支持	法国：	其他国家/地区：	悉尼：
	+33 800 901 793	+31 13 5835404	+61 2 9751 8500



我们强大的品牌组合：

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE

