

Strømblokk



nVent ERIFLEX Power Blocks are the main DIN mounted output/input devices for connection between primary and secondary switchboard, or main input/output connection for machine or industrial equipment (such as inverter, air conditioning machines, etc.). The high short circuit rated large cross section blocks offer time savings and reliability in every panel configuration. The complete Power Blocks range offers multiple connection types with up to four cables, nVent ERIFLEX Flexibar Advanced, or IBSB Advanced power braids.

SERTIFISERINGER



FUNKSJONER

I samsvar med RoHS

Halogen Fri

Can be connected with round cross section cable or flat connection system like nVent ERIFLEX Flexibar Advanced or IBSB Advanced Insulated Braided Conductor

Compact power block with high short circuit current rating

Tinned copper or aluminum block allows for copper or aluminum conductor direct connections, or using ferrule

Screw retaining cover is hinged and removable

Design allows for visual inspection of conductor and confirmation of connection

Modular snap-together blocks for building multi-pole power blocks

Easily clips onto DIN rail or mounts to panel with screws

Voltage detection and measurement connection

95% fill ratio

Conforms to EN 45545 obtaining an HL3 classification for chapter R23 and HL2 classification for chapter R22

SPESIFIKASJONER

Avslutt: Tind

Table 1/2						
Katalognummer	Artikkelnummer	Type	Typisk gjeldende vurdering av programmet, IEC	Materiale	Maks. Lederstørrelse på linje, IEC	Maks. Lederstørrelse på lasteside, IEC
SB125AL	561161	Kabel-kabel	180 A	Aluminum, Termoplast	35 mm ²	35 mm ²
SB80	561150	Kabel-kabel	100 A	Copper, Termoplast	16 mm ²	16 mm ²
SB80AL	561160	Kabel-kabel	100 A	Aluminum, Termoplast	16 mm ²	16 mm ²
SB125	561158	Kabel-kabel	170 A	Copper, Termoplast	35 mm ²	35 mm ²
SB160AL	561162	Kabel-kabel	230 A	Aluminum, Termoplast	70 mm ²	70 mm ²
SB250AL	561163	Kabel-kabel	400 A	Aluminum, Termoplast	120 mm ²	120 mm ²
SB160	561151	Kabel-kabel	250 A	Copper, Termoplast	70 mm ²	70 mm ²
SB400AL	561164	Kabel-kabel	500 A	Aluminum, Termoplast	240 mm ²	240 mm ²
SBF250	561171	Flexibar-kabel	250 A	Copper, Termoplast	70 mm ²	120 mm ²
SBF400AL	561165	Flexibar-kabel	400 A	Aluminum, Termoplast	100 mm ²	240 mm ²
SB250	561159	Kabel-kabel	400 A	Copper, Termoplast	120 mm ²	120 mm ²
SB2C400AL	561166	Kabel-2-kabler	400 A	Aluminum, Termoplast	240 mm ²	(2) 120 mm ²
SBF2C400AL	561167	Flexibar-2-kabler	400 A	Aluminum, Termoplast	100 mm ²	(2) 120 mm ²
SB2C250	561170	Kabel-2-kabler	400 A	Copper, Termoplast	120 mm ²	(2) 120 mm ²
SBF2C250	561172	Flexibar-2-kabler	400 A	Copper, Termoplast	70 mm ²	(2) 120 mm ²

Katalognummer	Artikkelnummer	Type	Typisk gjeldende vurdering av programmet, IEC	Materiale	Maks. Lederstørrelse på linje, IEC	Maks. Lederstørrelse på lasteside, IEC
SB400	561152	Kabel-kabel	500 A	Copper, Termoplast	240 mm ²	240 mm ²
SBF400	561153	Flexibar-kabel	400 A	Copper, Termoplast	100 mm ²	240 mm ²
SB630AL	561168	Kabel-kabel	630 A	Aluminum, Termoplast	500 mm ²	500 mm ²
SBF630AL	561169	Flexibar-kabel	630 A	Aluminum, Termoplast	240 mm ²	500 mm ²
SBF2C630AL	561173	Flexibar-2-kabler	800 A	Aluminum, Termoplast	240 mm ²	240 mm ²
SB2C2C1000AL	561175	2 kabler-2 kabler	1000 A	Aluminum, Termoplast	(2) 300 mm ²	(2) 300 mm ²
SB2C400	561154	Kabel-2-kabler	400 A	Copper, Termoplast	240 mm ²	(2) 120 mm ²
SB2C1000AL	561174	Kabel-2-kabler	1000 A	Aluminum, Termoplast	500 mm ²	(2) 300 mm ²
SBF2C400	561155	Flexibar-2-kabler	400 A	Copper, Termoplast	100 mm ²	(2) 120 mm ²
SBF3C1000AL	561176	Flexibar-3-kabler	1000 A	Aluminum, Termoplast	500 mm ²	(3) 300 mm ²
SB630	561156	Kabel-kabel	630 A	Copper, Termoplast	500 mm ²	500 mm ²
SBF4C1600AL	561177	Flexibar-4-kabler	1600 A	Aluminum, Termoplast	800 mm ²	(4) 300 mm ²
SBF630	561157	Flexibar-kabel	630 A	Copper, Termoplast	240 mm ²	500 mm ²

Table 2/2

Katalognummer	Artikkelnummer	Kortsiktig motstår strøm (Icw) 1s.	Sertifiseringer
SB125AL	561161	6kA	CE, ERIFLEX SB, UR, RoHS, cUR
SB80	561150	3kA	CE, ERIFLEX SB, UR, RoHS

Katalognummer	Artikkelnummer	Kortsiktig motstår strøm (Icw) 1s.	Sertifiseringer
SB80AL	561160	3kA	RoHS, UR, CE, ERIFLEX SB, cUR
SB125	561158	6kA	RoHS, UR, CE, ERIFLEX SB
SB160AL	561162	14.4kA	RoHS, UR, cUR, CE, ERIFLEX SB
SB250AL	561163	14.4kA	cUR, UR, CE, ERIFLEX SB, RoHS
SB160	561151	14.4kA	UR, CE, ERIFLEX SB, RoHS
SB400AL	561164	28.8kA	CE, ERIFLEX SB, UR, RoHS, cUR
SBF250	561171	14.4kA	UR, UL, RoHS, CE, ERIFLEX SB, cUL, QPQS7.E497276
SBF400AL	561165	28.8kA	CE, ERIFLEX SB, UR, cUR, RoHS
SB250	561159	14.4kA	CE, ERIFLEX SB, UR, RoHS
SB2C400AL	561166	28.8kA	cUR, UR, CE, ERIFLEX SB, RoHS
SBF2C400AL	561167	28.8kA	cUR, CE, ERIFLEX SB, RoHS, UR
SB2C250	561170	14.4kA	UL, CE, ERIFLEX SB, cUL, QPQS7.E497276, RoHS
SBF2C250	561172	14.4kA	CE, ERIFLEX SB, cUL, QPQS7.E497276, UL, RoHS
SB400	561152	28.8kA	RoHS, UR, CE, ERIFLEX SB
SBF400	561153	28.8kA	UR, RoHS, CE, ERIFLEX SB
SB630AL	561168	60kA	cUR, UR, RoHS, CE, ERIFLEX SB
SBF630AL	561169	60kA	CE, ERIFLEX SB, UR, cUR, RoHS
SBF2C630AL	561173	60kA	CE, ERIFLEX SB, cUL, QPQS7.E497276, UL, RoHS

Katalognummer	Artikkelnummer	Kortsiktig motstår strøm (Icw) 1s.	Sertifiseringer
SB2C2C1000AL	561175	72kA	RoHS, UL, CE, ERIFLEX SB, cUL, QPQS7.E497276
SB2C400	561154	28.8kA	CE, ERIFLEX SB, UR, RoHS
SB2C1000AL	561174	72kA	CE, ERIFLEX SB, cUL, QPQS7.E497276, UL, RoHS
SBF2C400	561155	28.8kA	RoHS, CE, ERIFLEX SB, UR
SBF3C1000AL	561176	72kA	RoHS, UL, CE, ERIFLEX SB, cUL, QPQS7.E497276
SB630	561156	60kA	RoHS, UR, CE, ERIFLEX SB
SBF4C1600AL	561177	96kA	RoHS, UL, CE, ERIFLEX SB, cUL, QPQS7.E497276
SBF630	561157	60kA	UR, RoHS, CE, ERIFLEX SB


YTTERLIGERE PRODUKTDETALJER

SBF250 is UL® 1953 Listed when used with SB250SPCR. Max Working Voltage for UL 1953 applications is 1250 VAC/DC.

Blue protection cover is less than 7% of the overall product weight.

Design Guideline for Distribution Blocks, Power Blocks and Power Terminals										
Derating according to Ambient* Temperature (°C) to maintain working temperature of 85°C										
Ambient Temperature (°C)	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°
Derating Coefficient (d)	1	1	1	0.94	0.88	0.82	0.75	0.67	0.58	0.47
*environment around the terminal blocks inside the enclosure										

DIAGRAMMER

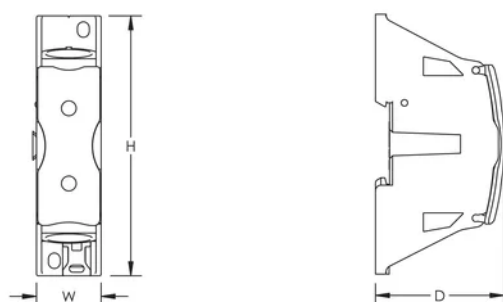

ADVARSEL

nVent-produkter må installeres og brukes bare som beskrevet i nVent sine instruksjonsark og opplæringsmateriell. Instruksjonsark er tilgjengelig på www.nvent.com og fra din nVent kundeservice-representant. Ukorrekt installasjon, misbruk, feilaktig anvendelse eller annen manglende etterlevelse av nVent sine instruksjoner og advarsler kan føre til produktfeil, skade på eiendom, alvorlige personskader og død og/eller gjøre garantien ugyldig.

Nord-Amerika

+1.800.753.9221

Alternativ 1 –

Kundeservice

Alternativ 2 – Teknisk
støtte

Europa

Nederland:

+31 800-0200135

Frankrike:

+33 800 901 793

Europa

Tyskland:

800 1890272

Andre land:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



Vår solide portefølje av merkevarer:

CADDY

ERICO

HOFFMAN

ILSCO

SCHROFF

TRACHTE