
# JB-EX-41-EP



### **CONNECT AND PROTECT**

## Multi purpose junction box 🖘

#### **PRODUCT OVERVIEW**

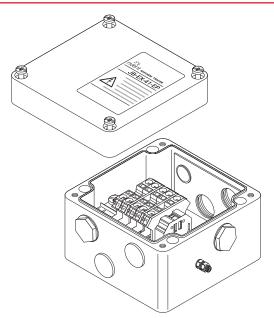

Industrial polyester junction box with earth plate for use in hazardous areas. This box can be used to make connections between power cables, heating cables and cold lead cables using M25 metallic connection kits or glands. Earthing of the connections is realized via the earth plate

Depending on the configuration of the system, the box can accommodate 6 cold lead entries and/or a power cable.


M25 connection kits have to be ordered separately or are integrated in the heating unit (eg MI heating units), depending on the type of heating cable being used. Cable connection is accomplished via DIN rail mounted spring-type terminals.

The box can be either wall or pipe mounted via the four holes moulded in the base of the box. For pipe mounting use one of the standard support bracket.

#### Typical use

	Power supply box, (power) splice box, (power) tee box, marshalling box.	
Entries		
	6 x M25	
	1 x M25	
Kit contents		
	1 x junction box with terminals on DIN rail	
	3 x M25 stopping plugs	
	4 x M25 rain plug (temporary)	

#### Dimensions (in mm)

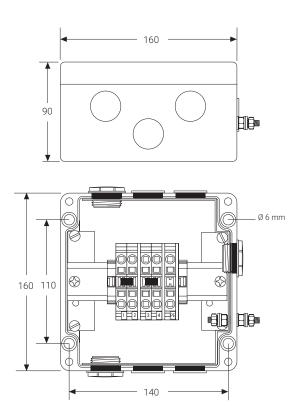

#### **Materials of construction**

Box & lid	Electrostatic charge-resistant glass-filled engineered polymer, black	
Sealing gasket	Silicone rubber	
Lid fixing screws	Stainless steel (captive)	
Technical details		
Ingress protection	IP66	
Ambient temperature range	-55°C to +55°C	
Terminals		
Quantity	5 pcs, bridged per 2	
Туре	Spring-type	
Labeling	1, 2, 3, 4, PE	
Maximum conductor size	10 mm² (solid & stranded)	
Maximum operating voltage	550 Vac	
Maximum operating current	53 A	

#### **APPROVALS**

For use in ordinary and hazardous area Zone 1 and Zone 2 (Gas), Zone 21 and Zone 22 (Dust)

#### **Temperature classification**

Т6

#### **Product certification**

Present logos of available certificates











More details about product certification, approvals and conditions of safe use are available in the installation manual at www.nVent.com/RAYCHEM.

RAYCHEM-DS-EU1406-JBEX41EP-EN-2401 RVent.com/RAYCHEM | 2

#### **ORDERING INFORMATION**

Order reference JB-EX-41-EP

Part number (Weight) 1244-020506 (1.9 kg)

(\*) in total no more than 7 terminals should be installed.

#### Accessories (to be ordered separately)

,	for fixation to cable tray) unit or contact nVent for more information
_	unit or contact nVent for more information
L-55-M25 (Polyamide)	
p to −55°C, 8-15 mm L-38-M25-METAL (Ni p	lated brass) 10-13.5 mm, outer diam. 13.5-21 mm
hase/neutral terminal: arth terminal: nd plate:	HWA-WAGO-PHASE HWA-WAGO-EARTH HWA-WAGO-ENDPLATE HWA-WAGO-JUMPER
L- p ha ar	38-M25-METAL (Ni p to −60°C, inner diam. ase/neutral terminal: th terminal:

#### **North America**

Tel +1.800.545.6258 Fax +1.800.527.5703 thermal.info@nVent.com **Europe, Middle East, Africa** 

Tel +32.16.213.502 Fax +32.16.213.604 thermal.info@nVent.com **Asia Pacific** 

Tel +86.21.2412.1688 Fax +86.21.5426.3167 cn.thermal.info@nVent.com **Latin America** 

Tel +1.713.868.4800 Fax +1.713.868.2333 thermal.info@nVent.com



Our powerful portfolio of brands:

CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER