


nVent ERIFLEX Flexbus HBC klämma

Data Solutions



CERTIFIERINGAR



DESIGN

Monteras snabbt och enkelt

Uppfyller RoHS

Rigid design assures even contact pressure

Ideal for on-site modifications

Made with non-magnetic material stainless steel for high-current connections to prevent the formation of magnetic fields

Contains crimped self-locking nut for vibration resistance and easy installation

No drilling needed to fix the Flexbus Conductor on the transformer/power supply palm

Includes voltage detection connecting point

SPECIFIKATIONER

Material: Rostfritt stål 304 (en 1,4301)

Table 1/2

Katalognummer	Artikelnummer	A.	B.	C.	D.	Tjocklek (T)
FLEXCLAMP63	508190	63mm	123mm	20mm	43mm	4mm
FLEXCLAMP80	508191	80mm	140mm	20mm	43mm	4mm
FLEXCLAMP160	508194	160mm	220mm	20mm	43mm	4mm
FLEXCLAMP100	508192	100mm	160mm	20mm	43mm	4mm
FLEXCLAMP120	508193	120mm	180mm	20mm	43mm	4mm

Table 2/2

Katalognummer	Artikelnummer	Hålstorlek (HS)	Vridmoment (TQ)	Enhetens vikt	Ledarebredd
FLEXCLAMP63	508190	5.5mm	100N·m	0.53kg	30 – 63mm
FLEXCLAMP80	508191	5.5mm	100N·m	0.84kg	70 – 80mm
FLEXCLAMP160	508194	5.5mm	100N·m	1.32kg	130 – 160mm
FLEXCLAMP100	508192	5.5mm	100N·m	0.92kg	90 – 100mm
FLEXCLAMP120	508193	5.5mm	100N·m	1kg	110 – 120mm


YTTERLIGARE PRODUKTINFORMATION

It is mandatory to use the HCBC Clamp associated with the HCBC Plate for proper Flexbus Conductor connection.

The minimum clearance distance is 14mm according to IEC 61439-1 with air pollution degree 3. If this distance cannot be respected, insulation material should be added between the metallic LV cover and the HCBC clamp. Flexbus IP2x Boots is also a solution.

If the Flexbus Conductors have a horizontal entry, an extender needs to be added between the power supply palm and HCBC Clamp and Plate.

DIAGRAMS

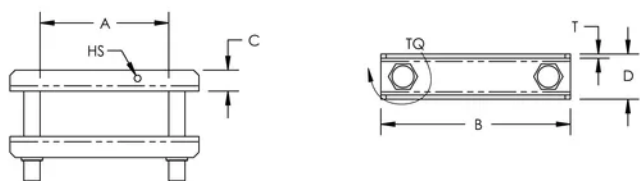

VARNING

nVent produkter ska installeras och användas endast så som anges i nVents bruksanvisning och utbildningsmaterial. Bruksanvisningar är tillgängliga på www.nvent.com och från din nVent kundtjänstrepresentant. Felaktig installation, missbruk, felapplicering eller annan brist i att helt följa nVents instruktioner och varningar kan orsaka att produkten brister, egendomsskador, allvarliga kroppsskador och dödsfall och/eller ogiltigförklara din garanti.



Vårt starka utbud av varumärken:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE