

SBLL-250 Lug-to-Lug Power Terminal

Power Utilities



认证



功能

Tinned copper block allows for copper or aluminum conductor connections

Accessible studs allow for easy connection of sections of nVent ERIFLEX Flexibar or other conductors

Design allows for visual inspection of conductor and confirmation of connection

Adjustable transparent cover

Modular snap-together blocks for building multi-pole power blocks

Easily clips onto DIN rail or mounts to panel with screws

SBLEC Power Terminals Fixing Accessory required for direct panel mount

RoHS compliant

Halogen free


技术参数

物料号	SBLL-250
订货号	561132
最大额定电流，IEC	290 A
最大额定电流，UL/CSA	255 A
短期耐受电流 (ICW) 1 秒	14.4 kA
峰值短路电流 (Ipk)	42 kA
短路额定电流 (SCCR)	100 kA
最大工作电压，IEC (Ui)	1,000 VAC 1,500 VDC
最大工作电压，UL (Vin)	1,000 V
螺柱连接数	2
螺柱连接导体宽度	20 – 24 mm
螺柱连接紧凑型绞合线尺寸	10 – 120 mm ²
螺柱连接线尺寸	#8 - 250 kcmil
高度 (H)	205.70 mm
宽度 (W)	52.300 mm
A	108 mm
单位重量	0.160 kg
认证详细信息	UL® 1059

其他产品详情

Power terminal connections are interchangeable and can be used as line side or load side connections.

分线盒、接线盒和接线端子的设计指南										
根据环境*温度 (°C) 降容以保持 85°C 的工作温度										
环境温度 (°C)	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°
降容系数 (d)	1	1	1	0.94	0.88	0.82	0.75	0.67	0.58	0.47
*柜子内端子排周围的环境										

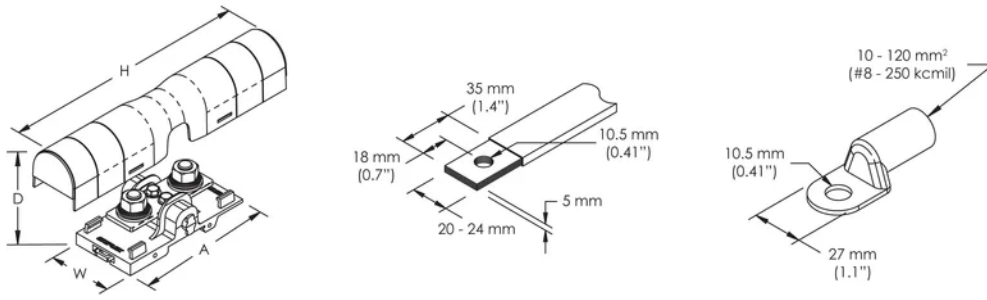

警告

应仅根据 nVent 的产品说明书与培训材料安装并使用 nVent 的产品。可访问 www.nvent.com 获取说明书，或者向您的 nVent 客服代表索取。错误安装、使用不当、滥用或未能完全遵守 nVent 的说明与警告，可能会造成产品故障、财产损失、严重的人身伤害及死亡和/或使得保修服务无效。



我们强大的品牌组合：

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE