


MTCA.0 系统，适用 2 块 Single Full-Size AMC 模块，1 HE

物料号

11850-023

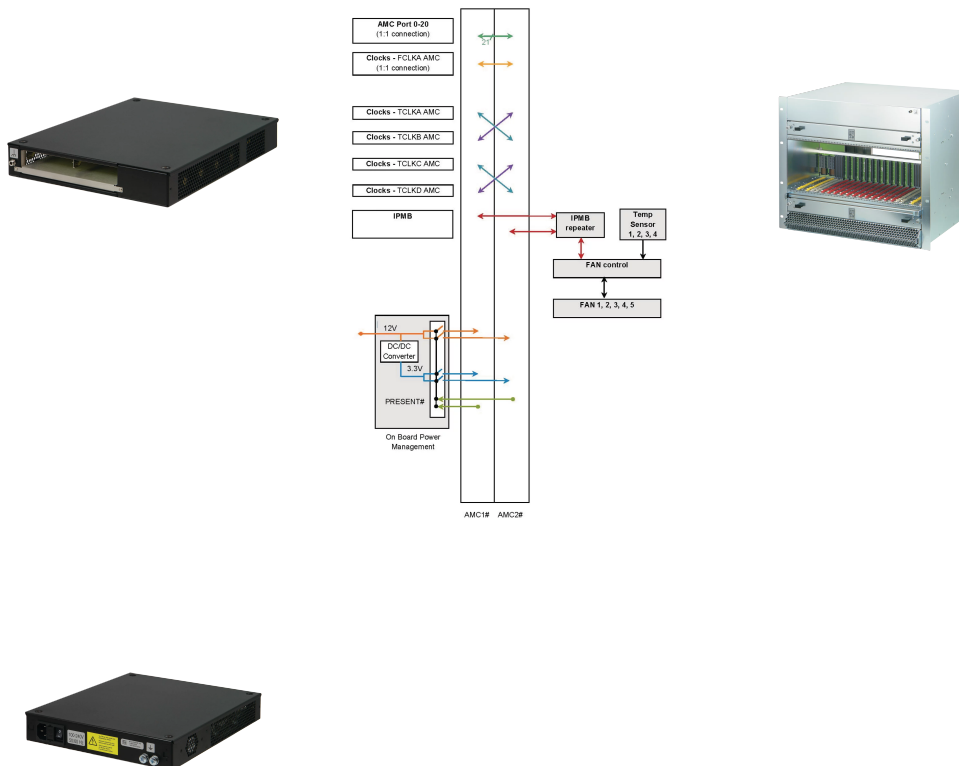

系统适用 2 个 AMC 模块。背板上集成式电源和电源开关可为 AMC 模块提供有效载荷的电源输入，无需单独的 MCH。

认证



功能

- 小型, 紧凑型机箱, 可容纳 2 块 Single Full-Size AdvancedMC 模块及一个可选的 2 HP 填充模块, 也可装入 2 个 Single Mid-Size 模块
- 两个 AdvancedMC 插槽之间的所有端口为直接连接 (请参阅背板拓扑) ; 每端口的数据传输速率高达 10 Gbps
- 机箱背面有支持 90 - 264 VAC 宽幅输入, 150 W 电源
- 12 VDC 电压由 AdvancedMC 模块的在位信号激活
- 在 55 °C 的环境温度下, 冷却能力为 150 W, 风道为从右至左, 风扇支持温控功能
- 风扇单元和风扇滤网便于维修或更换
- 机箱可堆叠放置, 适合安装在水平台面上

产品属性

- 产品类型: 系统
- 插槽数: 2
- 类型: 微型系统
- 背板类型: 所有端口均点对点连接
- 数据传输: 40 GbE; PCIe Gen3
- 每插槽的功率: 60W
- 交流输入电压: 100 – 240V
- 气流方向: 从右到左
- 机架高度: 1U
- 电源类型: 开放式框架
- 包含电源: 是
- 后部 I/O: 否
- 符合: PICMG MTCA.0 R2.0
- 深度: 302mm
- 包装数量: 1

其他产品详情

- 可应要求提供定制系统。
- 已完全装配、接线和经过测试。

警告

应仅根据 nVent 的产品说明书与培训材料安装并使用 nVent 的产品。可访问 www.nvent.com 获取说明书，或者向您的 nVent 客服代表索取。错误安装、使用不当、滥用或未能完全遵守 nVent 的说明与警告，可能会造成产品故障、财产损失、严重的人身伤害及死亡和/或使得保修服务无效。

North America

All locations
+1.763.422.2661
Chat with us:
nvent.com/schroff

Europe

Straubenhardt, Germany
+49.7082.794.0
Betschdorf, France
+33.3.88.90.64.90
Warsaw, Poland
+48.22.209.98.35
Assago, Italy
+39.02.932.7141
Chat with us:
nvent.com/schroff

Asia

Shanghai, China
+86.21.2412.6943
Qingdao, China
+86.532.8771.6101
Singapore
+65.6768.5800
Shin-Yokohama, Japan
+81.45.476.0271
Chat with us:
nvent.com/schroff

Middle East & India

Dubai, United Arab
Emirates
+971.4.378.1700
Bangalore, India
+91.80.6715.2001
Istanbul, Turkey
+90.216.250.7374
Chat with us:
nvent.com/schroff



我们强大的品牌组合:

CADDY ERICO HOFFMAN ILSCO SCHROFF TRACHTE