


WBT Performance Cable Tray, Shaped Wire

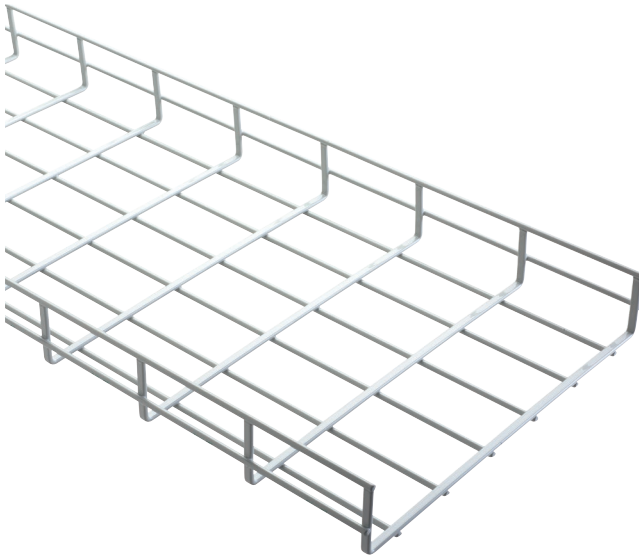

The construction of the nVent CADDY WBT Performance Cable Shaped Wire Tray eliminates stress and pressure points on today's high-speed/performance cabling media. The backbone of the platform features our "Shaped Tray" technology—offering substantial support improvement over traditional wire mesh tray. This technology increases support by 400% while reducing cable strain up to 65%, protecting high performance and fiber optic cable for the life of the installation.

FEATURES

- Provides optimal support for high-performance data cable, up to and including fiber optic, Cat 5e, Cat 6, Cat 6A, and Cat 7
- UL Classified as an equipment ground conductor, no field removal of paint required
- T-Weld edge wire for cable and installer protection
- Mill Certificates are available to document recycled content for possible LEED credits/certification



Material: Steel

Catalog Number	Finish	Color	Height H	Width W	Length L	Unit Weight	Certifications
WBT2X4S	Pregalvanized	—	2	4	118"	8 lb	UL
WBT2X6S	Pregalvanized	—	2	6	118"	9 lb	UL
WBT2X8S	Pregalvanized	—	2	8	118"	10 lb	UL
WBT2X12S	Pregalvanized	—	2	12	118"	14 lb	UL
WBT2X16S	Pregalvanized	—	2	16	118"	18 lb	UL
WBT2X18S	Pregalvanized	—	2	18	118"	19 lb	UL
WBT2X20S	Pregalvanized	—	2	20	118"	22 lb	UL
WBT2X24S	Pregalvanized	—	2	24	118"	24 lb	UL
WBT4X4S	Pregalvanized	—	4	4	118"	10 lb	UL
WBT4X6S	Pregalvanized	—	4	6	118"	11 lb	UL
WBT4X8S	Pregalvanized	—	4	8	118"	14 lb	UL
WBT4X12S	Pregalvanized	—	4	12	118"	18 lb	UL
WBT4X16S	Pregalvanized	—	4	16	118"	22 lb	UL
WBT4X18S	Pregalvanized	—	4	18	118"	23 lb	UL
WBT4X20S	Pregalvanized	—	4	20	118"	24 lb	UL
WBT4X24S	Pregalvanized	—	4	24	118"	29 lb	UL
WBT6X8S	Pregalvanized	—	6	8	118"	18 lb	UL
WBT6X12S	Pregalvanized	—	6	12	118"	22 lb	UL

Catalog Number	Finish	Color	Height H	Width W	Length L	Unit Weight	Certifications
WBT6X16S	Pregalvanized	–	6	16	118"	24 lb	UL
WBT6X18S	Pregalvanized	–	6	18	118"	25 lb	UL
WBT6X20S	Pregalvanized	–	6	20	118"	29 lb	UL
WBT6X24S	Pregalvanized	–	6	24	118"	32.01 lb	UL
WBT2X4SBA	Pregalvanized, Powder Coated	Black	2	4	118"	8 lb	cUL, UL
WBT2X6SBA	Pregalvanized, Powder Coated	Black	2	6	118"	9 lb	UL, cUL
WBT2X8SBA	Pregalvanized, Powder Coated	Black	2	8	118"	9.78 lb	UL, cUL
WBT2X12SBA	Pregalvanized, Powder Coated	Black	2	12	118"	14 lb	UL, cUL
WBT2X16SBA	Pregalvanized, Powder Coated	Black	2	16	118"	18 lb	UL, cUL
WBT2X18SBA	Pregalvanized, Powder Coated	Black	2	18	118"	19 lb	UL, cUL
WBT2X20SBA	Pregalvanized, Powder Coated	Black	2	20	118"	21.59 lb	UL, cUL
WBT2X24SBA	Pregalvanized, Powder Coated	Black	2	24	118"	24 lb	UL, cUL
WBT4X4SBA	Pregalvanized, Powder Coated	Black	4	4	118"	10 lb	cUL, UL
WBT4X6SBA	Pregalvanized, Powder Coated	Black	4	6	118"	11 lb	cUL, UL
WBT4X8SBA	Pregalvanized, Powder Coated	Black	4	8	118"	14 lb	UL, cUL
WBT4X12SBA	Pregalvanized, Powder Coated	Black	4	12	118"	18 lb	cUL, UL
WBT4X16SBA	Pregalvanized, Powder Coated	Black	4	16	118"	22 lb	cUL, UL
WBT4X18SBA	Pregalvanized, Powder Coated	Black	4	18	118"	23 lb	UL, cUL
WBT4X20SBA	Pregalvanized, Powder Coated	Black	4	20	118"	24 lb	cUL, UL
WBT4X24SBA	Pregalvanized, Powder Coated	Black	4	24	118"	29 lb	cUL, UL
WBT6X8SBA	Pregalvanized, Powder Coated	Black	6	8	118"	18 lb	UL, cUL
WBT6X12SBA	Pregalvanized, Powder Coated	Black	6	12	118"	22 lb	cUL, UL
WBT6X16SBA	Pregalvanized, Powder Coated	Black	6	16	118"	24 lb	UL, cUL
WBT6X18SBA	Pregalvanized, Powder Coated	Black	6	18	118"	25 lb	UL, cUL
WBT6X20SBA	Pregalvanized, Powder Coated	Black	6	20	118"	29 lb	UL, cUL
WBT6X24SBA	Pregalvanized, Powder Coated	Black	6	24	118"	32.01 lb	UL, cUL

Catalog Number	Finish	Color	Height H	Width W	Length L	Unit Weight	Certifications
WBT2X4SPW	Pregalvanized, Powder Coated	Pewter	2	4	118"	8 lb	cUL, UL
WBT2X6SPW	Pregalvanized, Powder Coated	Pewter	2	6	118"	9 lb	UL, cUL
WBT2X8SPW	Pregalvanized, Powder Coated	Pewter	2	8	118"	9.78 lb	UL, cUL
WBT2X12SPW	Pregalvanized, Powder Coated	Pewter	2	12	118"	14 lb	UL, cUL
WBT2X18SPW	Pregalvanized, Powder Coated	Pewter	2	18	118"	19 lb	cUL, UL
WBT2X24SPW	Pregalvanized, Powder Coated	Pewter	2	24	118"	24 lb	UL, cUL
WBT4X4SPW	Pregalvanized, Powder Coated	Pewter	4	4	118"	10 lb	cUL, UL
WBT4X6SPW	Pregalvanized, Powder Coated	Pewter	4	6	118"	11 lb	cUL, UL
WBT4X8SPW	Pregalvanized, Powder Coated	Pewter	4	8	118"	14 lb	UL, cUL
WBT4X12SPW	Pregalvanized, Powder Coated	Pewter	4	12	118"	18 lb	UL, cUL
WBT4X16SPW	Pregalvanized, Powder Coated	Pewter	4	16	118"	22 lb	UL, cUL
WBT4X18SPW	Pregalvanized, Powder Coated	Pewter	4	18	118"	23 lb	UL, cUL
WBT4X20SPW	Pregalvanized, Powder Coated	Pewter	4	20	118"	24 lb	cUL, UL
WBT4X24SPW	Pregalvanized, Powder Coated	Pewter	4	24	118"	29 lb	cUL, UL
WBT6X8SPW	Pregalvanized, Powder Coated	Pewter	6	8	118"	18 lb	UL, cUL
WBT6X12SPW	Pregalvanized, Powder Coated	Pewter	6	12	118"	22 lb	cUL, UL
WBT6X16SPW	Pregalvanized, Powder Coated	Pewter	6	16	118"	24 lb	UL, cUL
WBT6X18SPW	Pregalvanized, Powder Coated	Pewter	6	18	118"	25 lb	cUL, UL
WBT6X20SPW	Pregalvanized, Powder Coated	Pewter	6	20	118"	29 lb	UL, cUL
WBT6X24SPW	Pregalvanized, Powder Coated	Pewter	6	24	118"	32.01 lb	UL
WBT2X4SWH	Pregalvanized, Powder Coated	White	2	4	118"	8 lb	cUL, UL
WBT2X6SWH	Pregalvanized, Powder Coated	White	2	6	118"	9 lb	cUL, UL
WBT2X8SWH	Pregalvanized, Powder Coated	White	2	8	118"	9.78 lb	cUL, UL
WBT2X12SWH	Pregalvanized, Powder Coated	White	2	12	118"	14 lb	cUL, UL

Catalog Number	Finish	Color	Height H	Width W	Length L	Unit Weight	Certifications
WBT2X16SWH	Pregalvanized, Powder Coated	White	2	16	118"	18 lb	UL, cUL
WBT2X18SWH	Pregalvanized, Powder Coated	White	2	18	118"	19 lb	UL, cUL
WBT2X20SWH	Pregalvanized, Powder Coated	White	2	20	118"	21.59 lb	UL, cUL
WBT2X24SWH	Pregalvanized, Powder Coated	White	2	24	118"	24 lb	UL, cUL
WBT4X4SWH	Pregalvanized, Powder Coated	White	4	4	118"	10 lb	UL, cUL
WBT4X6SWH	Pregalvanized, Powder Coated	White	4	6	118"	11 lb	cUL, UL
WBT4X8SWH	Pregalvanized, Powder Coated	White	4	8	118"	14 lb	UL, cUL
WBT4X12SWH	Pregalvanized, Powder Coated	White	4	12	118"	18 lb	UL, cUL
WBT4X16SWH	Pregalvanized, Powder Coated	White	4	16	118"	22 lb	cUL, UL
WBT4X18SWH	Pregalvanized, Powder Coated	White	4	18	118"	23 lb	UL, cUL
WBT4X20SWH	Pregalvanized, Powder Coated	White	4	20	118"	24 lb	cUL, UL
WBT4X24SWH	Pregalvanized, Powder Coated	White	4	24	118"	29 lb	cUL, UL
WBT6X8SWH	Pregalvanized, Powder Coated	White	6	8	118"	18 lb	cUL, UL
WBT6X12SWH	Pregalvanized, Powder Coated	White	6	12	118"	22 lb	UL, cUL
WBT6X16SWH	Pregalvanized, Powder Coated	White	6	16	118"	24 lb	UL, cUL
WBT6X18SWH	Pregalvanized, Powder Coated	White	6	18	118"	25 lb	UL, cUL
WBT6X24SWH	Pregalvanized, Powder Coated	White	6	24	118"	32.01 lb	UL, cUL

2" DEEP TRAY

Tray Size	Splice Qty
2 x 4	2
2 x 6	3
2 x 8	3
2 x 12	3
2 x 16	4
2 x 18	4
2 x 20	4
2 x 22	5
2 x 24	5
2 x 26	6
2 x 28	6
2 x 30	6
2 x 32	7
2 x 34	7
2 x 36	8
2 x 38	8
2 x 40	9

These products are also available for Shaped Cable Tray and can be found by including an S to the end of any part number above.

4" DEEP TRAY



Tray Size	Splice Qty
4 x 4	3
4 x 6	3
4 x 8	3
4 x 12	3
4 x 16	4
4 x 18	4
4 x 20	4
4 x 22	4
4 x 24	5
4 x 28	5
4 x 30	6
4 x 32	6
4 x 34	6
4 x 36	7


These products are also available for Shaped Cable Tray and can be found by including an S to the end of any part number above.


6" DEEP TRAY

Tray Size	Splice Qty
6 x 8	3
6 x 12	3
6 x 16	3
6 x 18	4
6 x 20	4
6 x 22	4
6 x 24	4
6 x 26	5
6 x 28	5
6 x 30	5
6 x 32	6
6 x 34	6
6 x 36	7

These products are also available for Shaped Cable Tray and can be found by including an S to the end of any part number above.

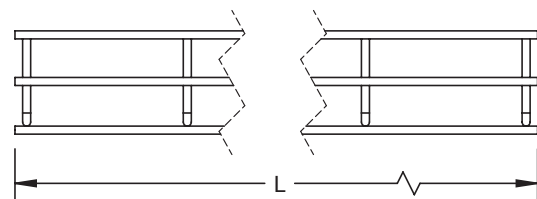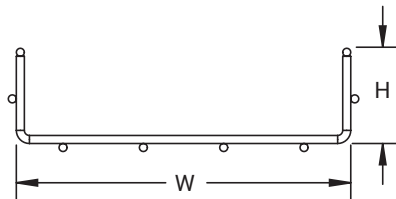

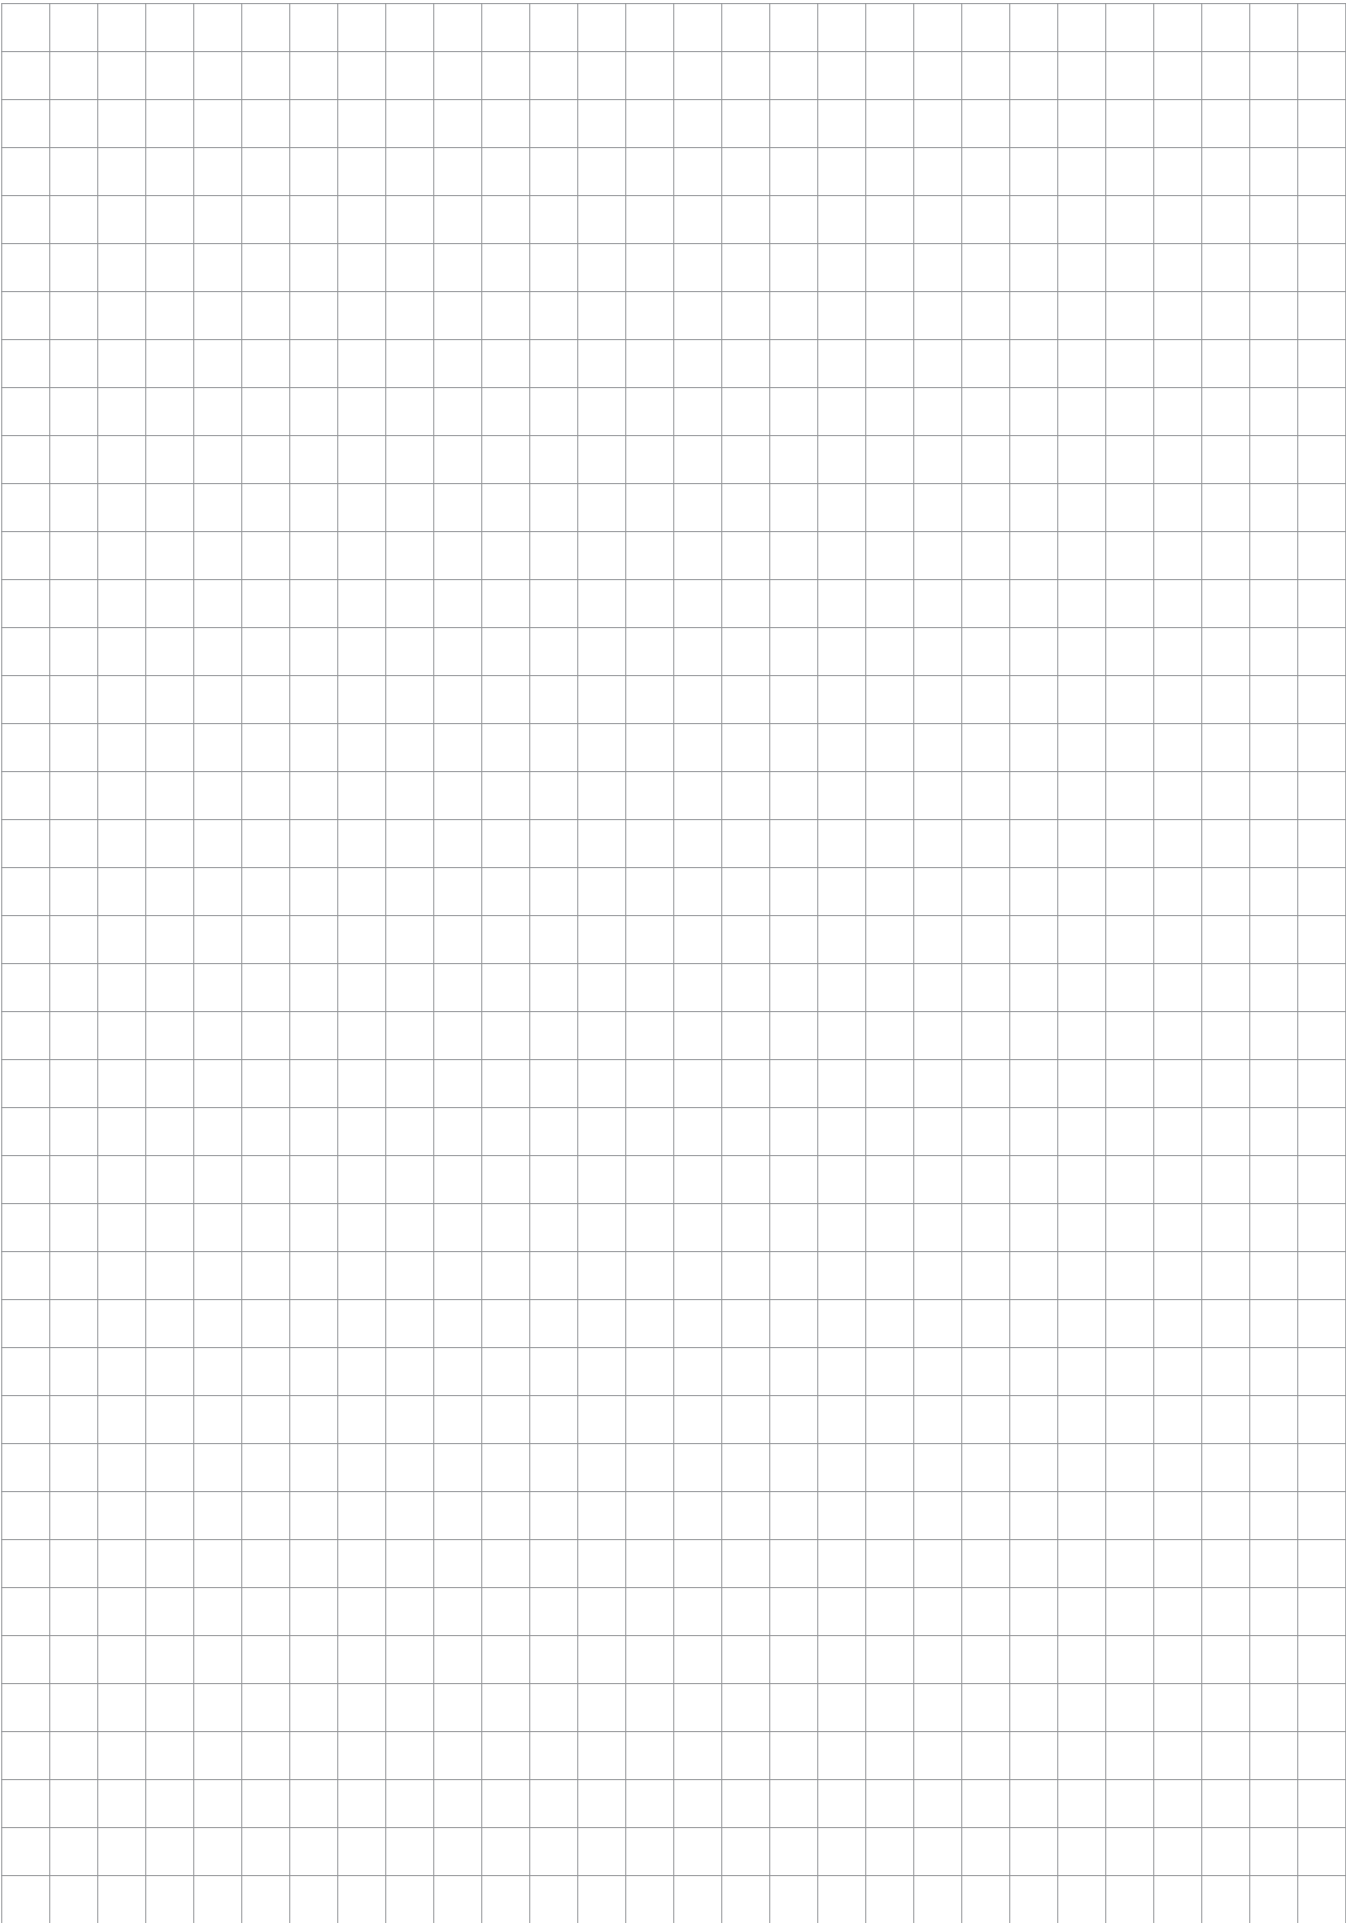

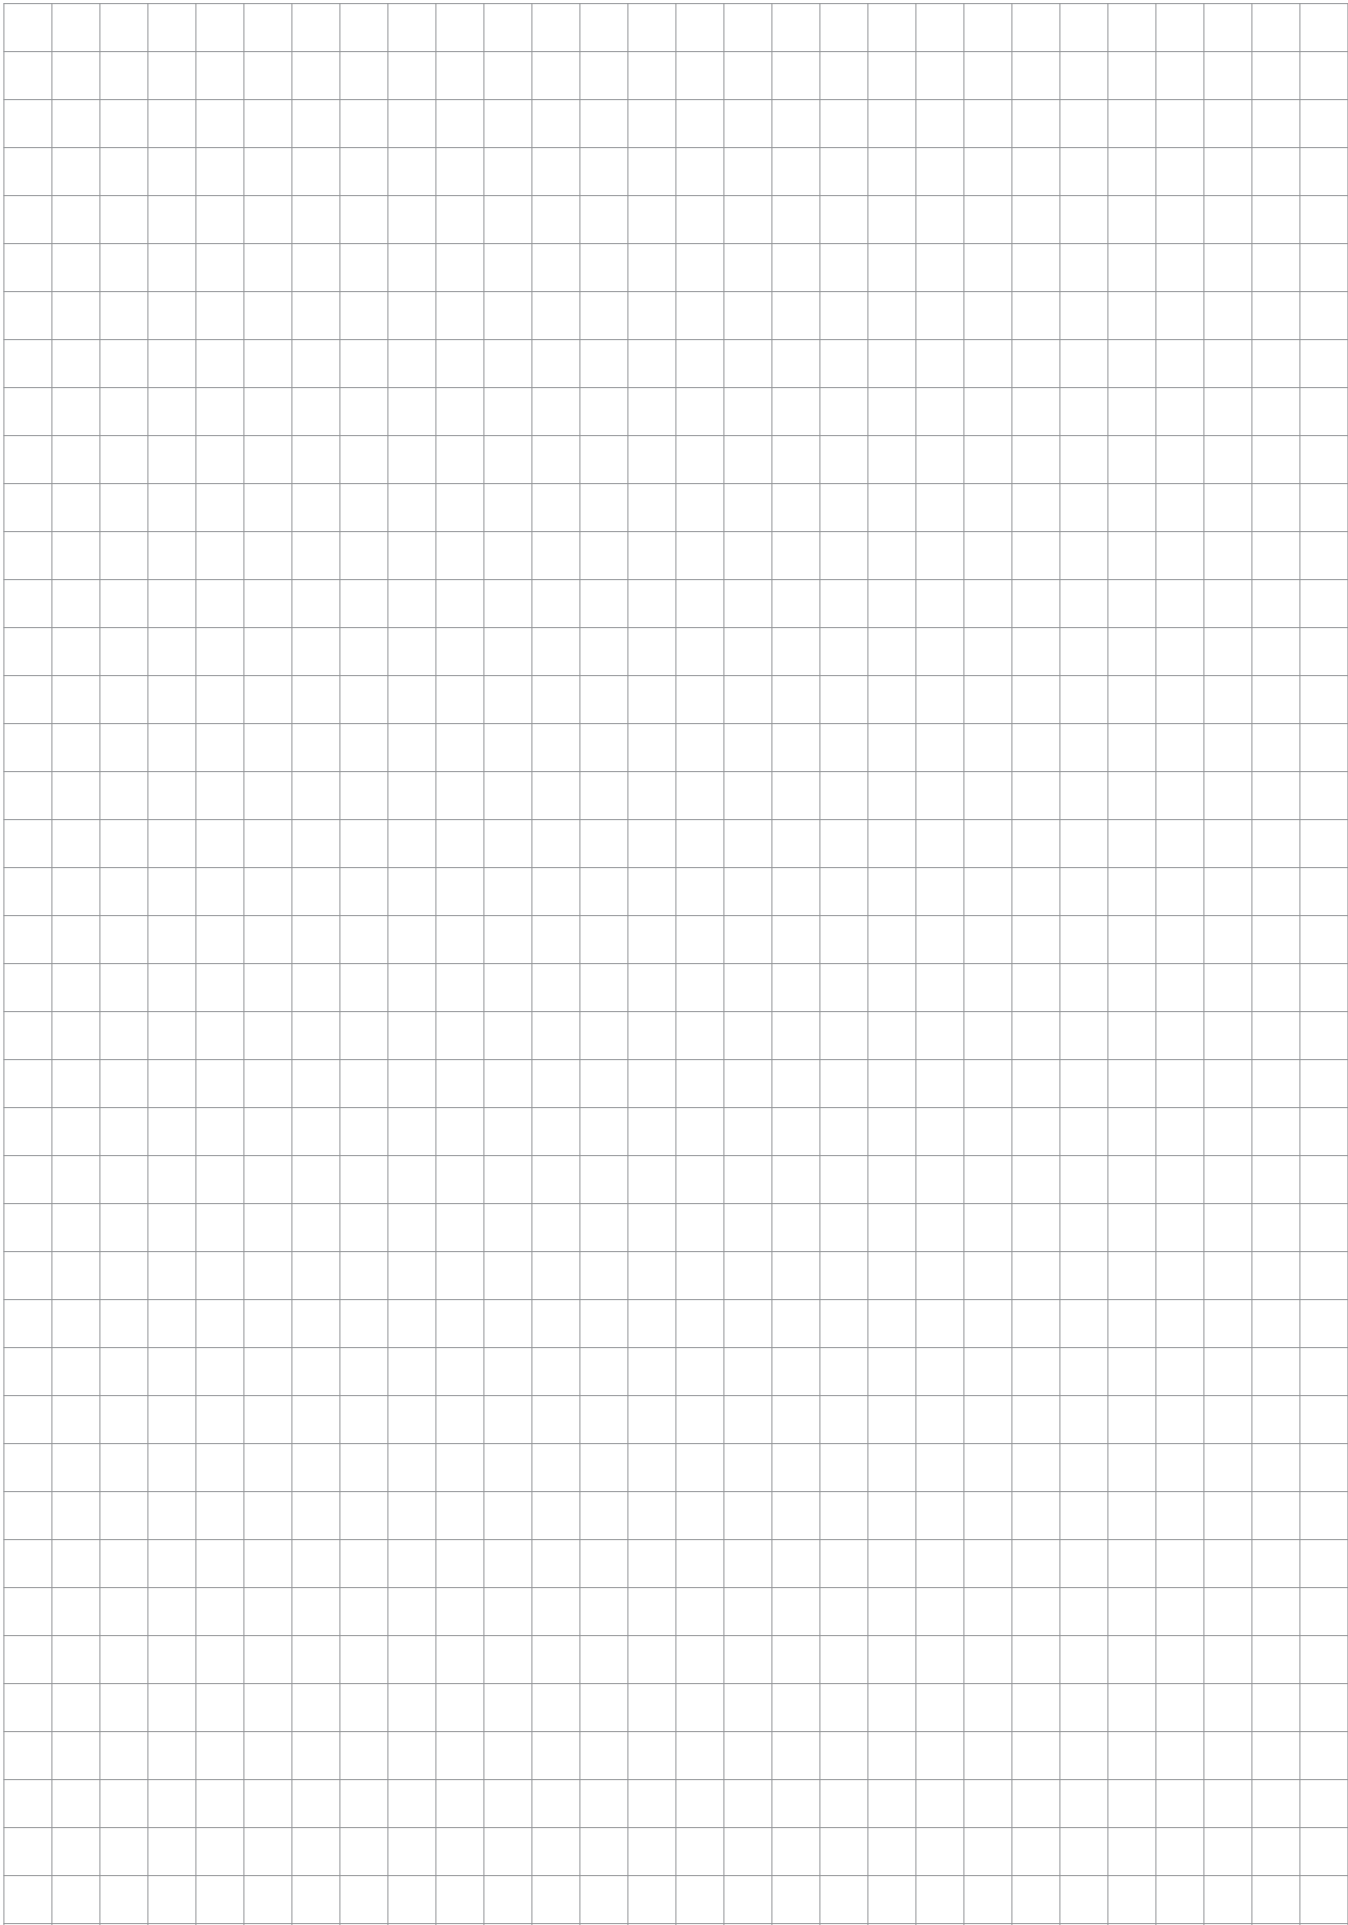



Our powerful portfolio of brands:

CADDY

ERICO

HOFFMAN

ILSCO

SCHROFF

TRACHTE

